

# Prosiding\_4\_IC3INA.pdf

*by*

---

**Submission date:** 20-Jun-2023 02:05PM (UTC+0700)

**Submission ID:** 2119559617

**File name:** Prosiding\_4\_IC3INA.pdf (286.53K)

**Word count:** 3471

**Character count:** 17350

# A Comparative Study of PID, ANFIS and Hybrid PID-ANFIS Controllers for Speed Control of Brushless DC Motor Drive

Hidayat<sup>1,2</sup>, Sasongko Pramonohadi<sup>2</sup> Sarjiya<sup>2</sup> and Suharyanto<sup>2</sup>

<sup>1</sup>Department of Electrical Universitas Bung Hatta, Padang, Indonesia  
(Tel : +681267048037; E-mail: [hdyttanjung@yahoo.com](mailto:hdyttanjung@yahoo.com))

<sup>2</sup>Department of Electrical and Information Technology Universitas Gajah Mada, Yogyakarta, Indonesia  
(Tel : +681313993300; E-mail: [sasongko@te.ugm.ac.id](mailto:sasongko@te.ugm.ac.id))

**Abstract**— this paper presents a comparative study of various controllers for the speed control of Brushless Direct Current Motor (BLDCM) to improve a performance of control. The most commonly used controller for the speed control of BLDCM is Proportional Integral Derivative (PID) controller. However, the PID controller has advantages such as: a good response, the simple structure and robustness of method, but it has disadvantages such as: optimally tuning gains of PID have been quite difficult and it cannot adapt a non-linear state of plant. Further, ANFIS controller has the ability to automatically learn and adapt with a state of plant. A novel hybrid controller that combines the advantages of PID controller and ANFIS controller is desired to improve the response of plant. To model of BLDCM is used an identification system method. Simulation results are presented and analyzed for all the controllers. It is observed that hybrid PID-ANFIS based controllers give better responses than PID or ANFIS for the speed control of BLDCM drive.

**Keywords**- PID; ANFIS; Hybrid PID-ANFIS; BLDCM drive; speed control.

## I. INTRODUCTION

Recently, BLDCM have been widely used as motor motion in the industries, the public life, the domestic life, information and office equipment. This is caused the BLDCM has advantages than other motors, such as the efficiency is better 13 % than induction motor, the volume is smaller 40 % than conventional DC motor [1]. The other advantages, caused no brush so they require little or no maintenance, they generate less acoustic and electrical noise than conventional DC motor, they can be used in hazardous operation environments (with flammable products)[2]. In spite of, the control equipment of BLDCM is still a limit and it is seldom met in the market. As an example, Atmel Corporation has produced the speed control of BLDCM using ATmega32M1, which applies a classic control that the gain tuning uses a trial and error method [3]. It cannot be used to a high power BLDCM. PID control with its three-term functionality covering treatment to both transient, steady-states response, offers the simplest, and yet most efficient solution to many real world control problem. In spite of the simple structure and robustness of this method, optimally tuning gains of PID controllers have been quite difficult [4].

In recent years, new artificial intelligent-based approaches have been proposed for speed control of the BLDCM, on kind of them is fuzzy logic controller which results still show an oscillation on steady state response. Furthermore, to decide on the domain of the fuzzy logic membership function is more difficult to be done [5],[6]. It can be overcome by using ANFIS controller, where the domain of membership function and the rule of fuzzy can be determined automatically. The choice of the number and the function of membership function will determine quality control. The speed response of BLDCM using ANFIS controller is obtained the best response on the bell function and five membership functions [7]. To improve the speed response of BLDCM, where the parallel fuzzy PID controller is applied which consists of three parallel fuzzy sub controllers that online update of the PID proportional, integral, and derivative gains value. The controller inputs are the speed error and the delayed control signal and represented by triangle functions [8]. The other controller structure to improve a performance of control was applied the fuzzy and neuro fuzzy controller for speed control of DC motor drive [9].

This research was applied three controller modes such as PID, ANFIS and Hybrid PID-ANFIS to control a speed of BLDCM. The aim is to obtain a good performance of control using MATLAB Simulink. Simulation results are presented and analyzed for all the controllers base transient parameter, such as: delay time (td), rise time (tr), settling time (tr), overshoot (Mp) and error (er). The model of speed control of BLDCM drive system used an identification system method base on dynamic response of a physical system.[10].

## II. CONTROLLER STRUCTURES

### A. PID Controller

PID (proportional integral derivative) control is one of the earlier control strategies, namely classical control that typical structure's is shown Fig.1. The error signal  $e(t)$  is used to generate the proportional, integral, and derivative action, with the resulting signals weighted and summed to form the control signal  $u(t)$  applied to the plant model. A mathematical description of the PID controller is [11]

$$u(t) = K_p \left[ e(t) + \frac{1}{T_i} \int_0^t e(\tau) d\tau + T_d \frac{de(t)}{dt} \right] \quad (1)$$

where  $u(t)$  is the input signal to the plant model, the error signal  $e(t)$  is defined as  $e(t) = r(t) - y(t)$ , and  $r(t)$  is the reference input signal. The behavior of the PID controller is determined by  $K_p, T_i, T_d$  values. That can be tuned by Ziegler-Nichols tuning formula that obtained when the plant model is given the step input.

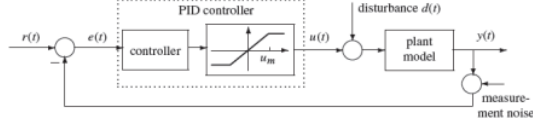


Fig. 1. A typical PID control structure

There are two Ziegler-Nichols tuning formula such as: base on step response and frequency response. The tuning formula base on the step response must be obtain  $L$  and  $T$  when the response system a like Fig.2a, whereas base on the frequency response must be obtain  $K_c$  that causes oscillation system, further determined  $P_c$ , as shown Fig.2b.

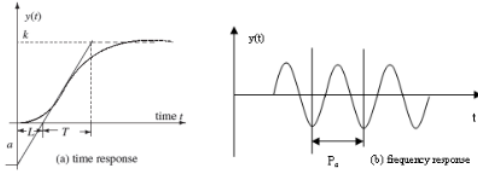


Fig. 2. The response of the plant for Ziegler-Nichols tuning formula

TABLE I. ZIEGLER-NICHOLS TUNING FORMULAE

Controller type	from step response			from frequency response		
	$K_p$	$T_i$	$T_d$	$K_p$	$T_i$	$T_d$
P	$1/a$			$0.5K_c$		
PI	$0.9/a$	$3L$		$0.4K_c$	$0.8T_c$	
PID	$1.2/a$	$2L$	$L/2$	$0.6K_c$	$0.5T_c$	$0.12T_c$

### B. ANFIS Controller

A typical architecture of an ANFIS which is used is Sugeno fuzzy models consist of five layers that every layer has the node. There are two kind of nodes that called the adaptive node (square symbol) and fixed node (circle symbol) as shown Fig. 3. The mechanism is designed using Sugeno with has two inputs  $x_1$  and  $x_2$  and one output  $y$ . For a first-order Sugeno fuzzy model [12],[13], a common rule set with two fuzzy if-then rules is the following

$$\text{If } x_1 \text{ is } A_1 \text{ and } x_2 \text{ is } B_1 \text{ Then } y_1 = c_{11}x_1 + c_{12}x_2 + c_{10} \quad (2)$$

$$\text{If } x_1 \text{ is } A_2 \text{ and } x_2 \text{ is } B_2 \text{ Then } y_2 = c_{21}x_1 + c_{22}x_2 + c_{20} \quad (3)$$

If  $\alpha$  is predicated for two roles are  $w_1$  and  $w_2$ , then can be determined the weight average as below

$$y = \frac{w_1 y_1 + w_2 y_2}{w_1 + w_2} \quad (4)$$

The layer function:

#### Layer 1

Every node  $i$  in this layer is an adaptive node which a node activation function parameter. The output of every node is the membership function degrees which given by input membership function as the following

$$\alpha_{A1}(x_1), \alpha_{B1}(x_2), \alpha_{A2}(x_1) \text{ or } \alpha_{B2}(x_2) .$$

$$O_{1,i} = \mu_{A_i}(x_1), \quad \text{for } i = 1, 2, \text{ or} \quad (5)$$

$$O_{1,i} = \mu_{B_i}(x_2), \quad \text{for } i = 3, 4,$$

If membership function is given by the generalized bell function as below

$$\mu(x) = \frac{1}{1 + \left| \frac{x-c}{a} \right|^{2b}} \quad (6)$$

where  $\{a,b,c\}$  are the parameter set. As the value of these parameters changes, the bell-shaped function varies accordingly, thus exhibiting various forms of membership functions for fuzzy set A. Parameters in these layers are referred to as premise parameters.

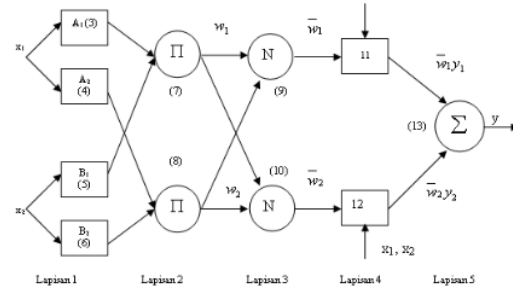


Fig. 3 The architecture ANFIS

#### Layer 2

Every node in this layer is fixed node is labeled  $\Pi$ , whose output is the product of all the incoming signals as below

$$O_{2,i} = w_i = \mu_{A_i}(x_1) \mu_{B_i}(x_2), \quad \text{for } i = 1, 2 \quad (7)$$

Each node output represents the firing strength ( $\alpha$  predicate) of a rule. In general, any other T-norm that performs fuzzy AND can be used as the node function in this layer.

#### Layer 3

Every node in this layer is a fixed node labeled N. The  $i^{\text{th}}$  node calculates the ratio of the gain ratio  $i^{\text{th}}$  rule firing strength ( $\alpha$  predicate) to the sum of all rules' firing strengths as below

$$O_{3,i} = \bar{w}_i = \frac{w_i}{w_1 + w_2}, \quad i = 1, 2 \quad (8)$$

For convenience, outputs of this layer are called normalized firing strengths.

#### Layer 4

Every node  $i$  in this layer is an adaptive node with a node function is

$$O_{4,i} = \bar{w}_i y_i = \bar{w}_i (c_{i1}x_1 + c_{i2}x_2 + c_{i0}) \quad i = 1, 2 \quad (9)$$

where  $\bar{w}_i$  is a normalized firing strength from layer 3 and  $\{c_{i1}, c_{i2}, c_{i0}\}$  are the parameter set of this node. Parameters in this layer are referred to as consequent parameters.

#### Layer 5

The single node in this layer is a fixed node labeled  $\Sigma$ , which computes the overall output as the summation of all incoming signals as following

$$O_{5,i} = \sum_i \bar{w}_i y_i = \frac{\sum_i w_i y_i}{\sum_i w_i} \quad (10)$$

The parameter to be trained are a, b and c of the premise and  $c_{i1}, c_{i2}$  and  $c_{i0}$  of the consequent parameters. ANFIS is trained using hybrid learning algorithm that consists of two steps such as feed forward pass and backward pass. More specifically, in the forward pass of the hybrid learning algorithm, node outputs go to forward until layer 4 and consequent parameters are identified by the least squares method. In the backward pass, the error signal propagates backward and the premise parameters are updated by gradient descent.

#### C. Hybrid PID-ANFIS

The Hybrid PID ANFIS controller is combining two controller modes such as PID controller and ANFIS controller. There are two control structures of hybrid PID ANFIS controller are proposed, such as summing hybrid and selecting hybrid.

##### 1) Summing hybrid

The summing hybrid structure, where the PID controller output is added to the ANFIS output controller. The block diagram summing hybrid PID ANFIS is shown in Fig. 4.

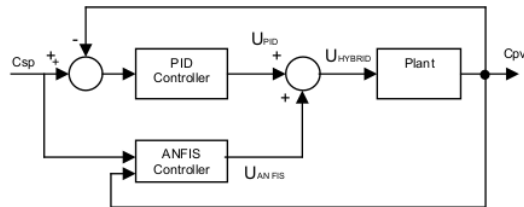


Fig. 4. The block diagram summing hybrid PID ANFIS

The controller output of summing hybrid is represented by

$$U_{HYBRID} = U_{PID} + U_{ANFIS} \quad (11)$$

##### 2) Selecting hybrid

This structure, where the controller action is divided in two regions. The output of PID controller is as a main control signal and the output of ANFIS controller is as a recovery control signal which switched base on the persen speed error ( $\Delta E_{rr}$ ). Performance of the controller action depends on the ability to determine the persen speed error value that can be found by trial and error. The structur of the selecting hybrid is shown in Fig.5.

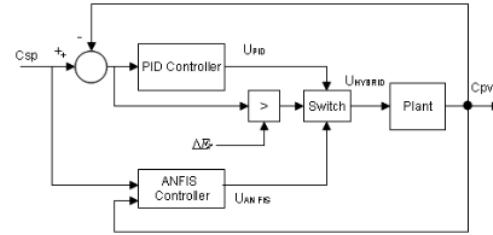


Fig. 5. The block diagram selecting hybrid PID ANFIS

The controller output of selecting hybrid is represented by,

$$U_{HYBRID} = \begin{cases} U_{PID}, & \text{for } Error > \Delta E_{rr} \\ U_{ANFIS}, & \text{for } Error \leq \Delta E_{rr} \end{cases} \quad (12)$$

### III. BLDCM MODELING

Generally, BLDCM is constructed of the Permanent Magnet Synchronous Machine (PMSM) 3 phase star connection, 2 poles, a AC source and rectifier, a rotor position sensor, 3 phase inverter and an algorithm control [13],[14], as shown in Fig.6. In practice, a BLDCM have been completed by those elements which generally consist of two parts of separate elements, such as a BLDCM driver and a BLDCM.

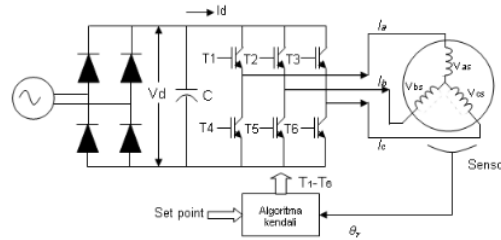


Fig.6 The circuit element of BLDCM

To model BLDCM base on estimation parameter uses an identification system. It is done to identify the discrete-time model from measured input and output data, further in Matlab toolbox is provide function  $arx()$ . If the measured input and output signals are expressed by column vectors  $u$  and  $y$  the orders of the numerator and denominator as assumed to be  $m-1$  and  $n$ , respectively, and the delay terms is  $d$ , the following statement can be used, as in [11],

$$H = arx([y,u],[n,m,d]) \quad (13)$$

In this case, input is speed setting and output is actual speed that can be obtained by measuring dynamic speed response of BLDCM.

### IV. SIMULATION AND ANALYSIS

According to the model of speed control systems for BLDCM drive mentioned above, some vital simulation works have been conducted. Motor model parameters used for simulation is such as [15]:





Fig. 10. Speed response of all control structures for speed setting 2000 Rpm

The responses of all controllers are stable with error similar to zero, but the ANFIS is more slowly than PID and hybrid PID ANFIS controller. The overshoot PID is higher than selecting hybrid PID ANFIS controller. The response of summing hybrid PID ANFIS is the fastest, but the overshoot increases 75%, the settling time 1,4 second. This is caused by each of the output signal controller to strengthen.

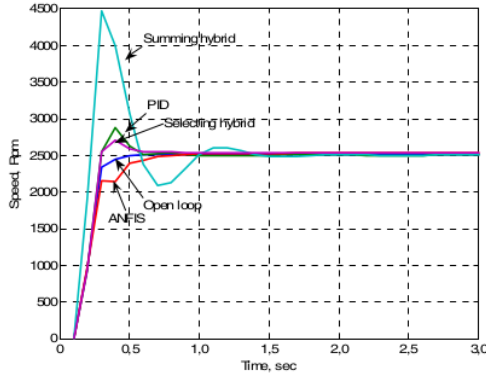


Fig. 11. Speed response of all control structures for speed setting 2500 Rpm

TABLE II. THE TRANSIENT PARAMETER OF BLDCM SPEED RESPONSE FOR SPEED SET 2000 AND 2500 RPM.

Controller structures	td (sec)	tr (sec)	rs (sec)	Mp (%)	Error (rpm)
PID	0,25	0,3	0,60	12,5	0
ANFIS	0,25	0,4	0,70	0	0
Summing Hybrid PID-ANFIS	0,15	0,20	1,40	75	0
Selecting Hybrid PID-ANFIS	0,25	0,3	0,56	5	0

The transient response of selecting hybrid PID ANFIS for the delta error less equal 10% ( $\Delta E_{rr} \leq 0,1E_{rr}$ ) was resulted the best response. It has corresponded to what really designed of the selecting hybrid PID ANFIS controller. It has ability to select the output controller accurately.

The second experiment is given the speed setting 1000 rpm, then after 1,5 second it is increased to 2000 rpm which responses is shown in Fig. 12. The speed setting can be followed by actual speed for all control structures although the overshoot of summing hybrid controller is higher than others. It is caused by the output of summing hybrid controller is higher too, which is shown in Fig. 13.

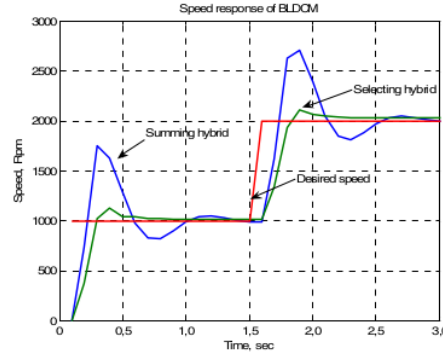


Fig. 12. Speed responses hybrid controller for speed setting changes from 1000 to 2000 rpm

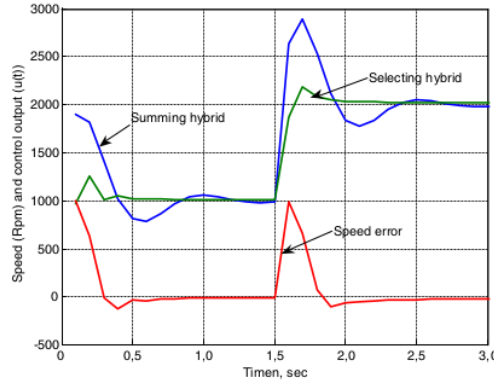


Fig. 13. The control output of hybrid controller for speed setting changes from 1000 to 2000 rpm

## V. CONCLUSION

This paper has described to control the BLDCM speed, that compared the several control structures. The model of BLDCM was constructed by identification system that represented of the real system that obtained to measure the dynamic response system. The hybrid PID ANFIS controller which applied the selecting error was obtained the best response. It was to obtained when the error less equal than 10% the ANFIS controller is done but the error great equal 10% the PID controller is done. Other word, the PID controller is as main control and the ANFIS is as recovery control. The hybrid PID ANFIS controller which applied the summing output PID controller and ANFIS controller can be made the rise time shorter but the overshoot increased.

## REFERENCES

- [1]. Gieras, J.F, Wing,M, Permanent Magnet Motor Technology Design & Application, 2<sup>nd</sup> Edition, Printed USA, London UK, 2002.
- [2]. Hidayat, Sasongko.PH, Srjiya and Suharyanto, "The Speed and Torque Control Strategy of the Brushless DC Machine", CITEE 2010, Yogyakarta, 20 Juli 2010.

- [3]. Atmel Corporation, "Brushless DC Motor Control Using ATmega 32M1" April 2008.
- [4]. Boumediane A, Brahim G, and Brahim M, "Setting up PID DC Motor Speed Control Alteration Parameters Using Particle Swarm Optimization Strategy", Leonard Electronic Journal of Practices and Technologies, Issue 14, January-Juni 2009, pp. 19-32.
- [5]. Munawar, I, Hidayat, "Design and Implementation Speed Control of the 3 Phase Synchronous Machine to Like Performance of DC Machine Using Fuzzy Logic", SMED 2000, FT UGM, Yogyakarta, 2000.
- [6]. Hidayat, Munawar, I, "Design and Implementation the Speed Control of Brushless DC Machine Using Fuzzy Logic", Thesis Magister Program of Electrical Departement ITB, Bandung, 2000
- [7]. Hidayat, PH.Sasongko, Sarjiya & Suharyanto, " Performance Analysis of Adaptive Neuro Fuzzy Inference Systems (ANFIS) for Speed Control of Brushless DC Motor, in Proc. ICEEI 2011, 17-19 July 2011, p. 211.
- [8]. Rubai.A, Marcel J, Castro.S, Abdul R.O, " Design and Implementation of Paralel Fuzzy PID Controller for High-Performance Brushless Motor Drives : An Integrated Environment for Rapid Control Prototyping" IEEE Transactions on Industry Applications, Vol. 44, No. 4, July/ Agus 2008.
- [9]. Khuntia. S.R, Mohanty.KB, S. Panda and C. Ardil, " A Comparative Study of P-I, I-P, Fuzzy and Neuro Fuzzy Controllers for Speed Control of DC Motor Drive" International Journal of Electrical Systems Science and Engineering 1, Januari 2009.
- [10]. Hidayat, Sasongko.PH, Sarjiya and Suharyanto, "Modeling the Speed Control of Brushless DC Machine Base on Identification Model System". In Proc. International Conference On Instrumentation, Communication, Information Technology and Biomedical Engineering (ICICI-BME 2013), 7-8 November, Bandung 2013.
- [11]. Xue.D, Chen.Y and Atherton.P.D, "Linear Feedback Control Analysis and Design with MATLAB, Philadelphia, 2007
- [12]. Jang.J-S.R, Sun.C.T, Mizutani.E, " Neuro-Fuzzy and Soft Computing", Prentice-Hall International Inc, USA, 1997
- [13]. Hidayat, PH.Sasongko, Sarjiya & Suharyanto, "Modeling and Simulation of Adaptive Neuro Fuzzy Inference Systems (ANFIS) for Speed Control of Brushless DC Motor", Proc. CITEE 2011, Yogyakarta, 28 July 2011, paper E-4-1.
- [14]. Krause, Paul.C, " Analysis of Electric Machinery And Drive Systems", IEEE Press, 2<sup>nd</sup> Edition, USA, 2002.
- [15]. Jinan Kenya Electronic, " Operating Instruction BLDCM Motor Control, Cina, 2009.
- [16]. Brian, R "The Design of PID Controllers Using Ziegler Nichols Tuning", 2008.

# Prosiding\_4\_IC3INA.pdf

---

## ORIGINALITY REPORT

---

**22%**

SIMILARITY INDEX

**13%**

INTERNET SOURCES

**8%**

PUBLICATIONS

**15%**

STUDENT PAPERS

---

## MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

---

2%

★ Submitted to Anadolu University

Student Paper

---

Exclude quotes      On

Exclude matches      Off

Exclude bibliography      On