

PAPER • OPEN ACCESS

## Effects of tangential inlet shape and orientation angle on the fluid dynamics characteristics in a biomass burner

To cite this article: Pasyimi *et al* 2018 *J. Phys.: Conf. Ser.* **1090** 012007

View the [article online](#) for updates and enhancements.



**IOP | ebooks™**

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

# Effects of tangential inlet shape and orientation angle on the fluid dynamics characteristics in a biomass burner

Pasymi<sup>1,2</sup>, Y W Budhi<sup>1</sup> and Y Bindar<sup>1†</sup>

<sup>1</sup> Energy and Processing System Research Group, Study Programmes of Chemical, Bioenergy and Chemurgy Engineerings, Faculty of Industrial Technology, Institut Teknologi Bandung, Indonesia

<sup>2</sup> Department of Chemical Engineering, Faculty of Industrial Technology, Bung Hatta University, Padang, Indonesia

† Corresponding author e-mail: yazid@che.itb.ac.id

**Abstract.** The perennial crops are potentially used as renewable fuels in the boiler furnace. Due to its specific characteristics, the burner design for this biomass needs to be properly developed. The burner design proposed here is a cylindrical burner having an axial inlet and a pair of tangential injection. This study is aimed to investigate the effect of tangential inlet geometry on the burner performance, through numerical evaluation of fluid dynamics characteristics. The numerical evaluations are conducted using  $k-\varepsilon$  turbulence model under Ansys-Fluent software. The simulation results showed that, at certain orientation angles of tangential inlet, there are back flows from furnace to the internal burner. This phenomenon is responsible to the flame stability in the burner. The turbulence intensity and convective heat transfer coefficient are also influenced by the tangential inlet orientation angle. For same cross sectional area, the rectangular tangential inlet shape generated deeper backflow penetration and higher turbulence intensity than that was done by the circular ones. One of the rectangular shape shortcomings to the circular ones is to produce the higher static pressure, which correlate to the higher burner operating cost. This investigation study concluded that the burner with rectangular tangential inlet shape and orientation angle of  $20^\circ$  potentially produces the best burner performance.

**Keywords:** backflow penetration, biomass burner, heat transfer coefficient, orientation angle, turbulence intensity, static pressure.

## 1. Introduction

In recent years, along with the depletion of fossil fuel stocks, researchers have begun to develop biomass utilization for electricity generation, particularly for small to medium scale plant [1, 2, 3, 4, 5]. In addition to the renewable objective, biomass is also environmentally friendly ( $\text{CO}_2$  neutral) and has a relatively cheap power generation cost. The perennial crops, one of the non-woody biomass, are proven to be much potential biomass types to be used as fuel in the steam power plant. As an example, *miscanthus x giganteus* has an energy potential of  $\pm 442.5$  GJ/hectare/year and can substitute 20 tons of sub bituminous coal [1].

Generally, burner design is determined by the process occurred in the burner. For solid fuel burners, there are several processes that are expected to take place in a burner, such as the body heating, the devolatilization and the combustion. Some conditions are needed to make processes to take place well in the burner, among others: high temperature, intensive mixing, and sufficient oxygen and residence time [6]. The embodiment of the conditions can be evaluated through the fluid dynamics characteristics in the burner such as turbulence intensity, velocity profile and pressure drop. Furthermore, the velocity profile can illustrate heat transfer rate, residence time and back flow phenomenon.

Some researcher reported that the performance of burner can be increased by involving the tangential flow [7, 8]. The tangential flow has a potential to create the backflow from the furnace to the internal burner. The backflow will carry the hot flue gas from the furnace into the internal burner. This causes the burner temperature to remain high, thus, the process of the particle heating, the devolatilization and



the combustion can take place in the burner, continuously. In addition, the presence of the tangential flow may also increase the mixing intensity. One of the challenges of the tangential flow addition in a burner is to minimize the static pressure. The fluid static pressure is a fluid flow resistant that must be resisted by air blower. The greater the fluid static pressure along the burner, the greater the blower power demand and the greater the burner operational cost becomes.

Currently, the use of the tangential flow in the burner is intensified because of its superiorities. The tangential flow in the burner can be generated through the swirler or through the use of the mechanical devices or through the installation of the tangential injection inlets. The biomass burner proposed here consists of a horizontal cylinder having an internally-extended axial inlet and a pair of tangential injection, as shown in Figure 1.

This research is aimed to study the effects of tangential inlet geometry on the burner performance through the fluid dynamics characteristics evaluation. The tangential inlet geometries studied here are the shape and the orientation angle, while the fluid dynamics characteristics evaluated are turbulence intensity, heat transfer rate, pressure drop and back flow penetration.

The fluid turbulence intensity is represented by the equation (1). Variable  $\bar{u}_i$  is the mean velocity for each direction component and  $u'_i$  is the fluctuation velocity for each direction component [9].

$$I = \frac{\sqrt{((u'_x)^2 + u'_y{}^2 + u'_z{}^2)/3}}{(\bar{u}_x + \bar{u}_y + \bar{u}_z)/3} \quad (1)$$

The heat transfer rate are calculated as convective heat transfer coefficient, as given by equation (2).

$$h = 0.023 \left(\frac{k}{D_c}\right) \left(\frac{\rho D_c \bar{u}}{\mu}\right)^{0.8} \left(\frac{c\mu}{k}\right)^{0.4} \quad (2)$$

Variable  $h$  is convective heat transfer coefficient,  $k$  is thermal conductivity,  $D_c$  is burner diameter,  $c$  is specific heat,  $\rho$  is density and  $\bar{u}$  is magnitude velocity. From equation (2) shown that, for isothermal conditions, the convective heat transfer coefficient is directly proportional to the fluid velocity.


## 2. Investigation methodology

The method used in this research was the Computational Fluid Dynamic (CFD) technique with the Ansys Fluent as the CFD engine. This method has many advantages than experiment, such as low cost, time saving and able to give comprehensive data and information with acceptable results.

### 2.1 Experimental set-up for simulation

The proposed burner design in this study consisted of a horizontal cylindrical body and an inlet section. The inlet section was a certain length cylinder embedded by the internally- extended axial inlet and a pair of tangential injection, as shown in Figure 1. The mixing between the axial and the tangential flows, including their interaction impacts, occurred in the cylindrical body of the burner. The burner fluid dynamics performances were largely determined by the fluid dynamics characteristics in this cylinder. The cylindrical body had a diameter ( $D_c$ ) of 0.3 m and the cylinder aspect ratio ( $L/D_c$ ) of 1.5. The axial inlet was a cylindrical tube with diameter ( $D_{ai}$ ) of 0.15 m.

The tangential inlet has two cross-sectional shape variations those were circular and rectangular shape. The circular shape has a diameter ( $D_{ti}$ ) of 0.062 m, while the rectangular shaped has a width ( $l$ ) of 0.1 m and thickness ( $t$ ) of 0.03 m. The cross-sectional area of the two tangential inlet shape was made equal along the study. The best tangential inlet shape would be chosen to study the effect of orientation angle on the burner fluid dynamics performances. The variations of tangential inlet orientation angle used were  $15^\circ$ ,  $20^\circ$ ,  $25^\circ$ ,  $30^\circ$ ,  $35^\circ$ ,  $40^\circ$ ,  $45^\circ$ ,  $60^\circ$ ,  $75^\circ$  and  $90^\circ$ .

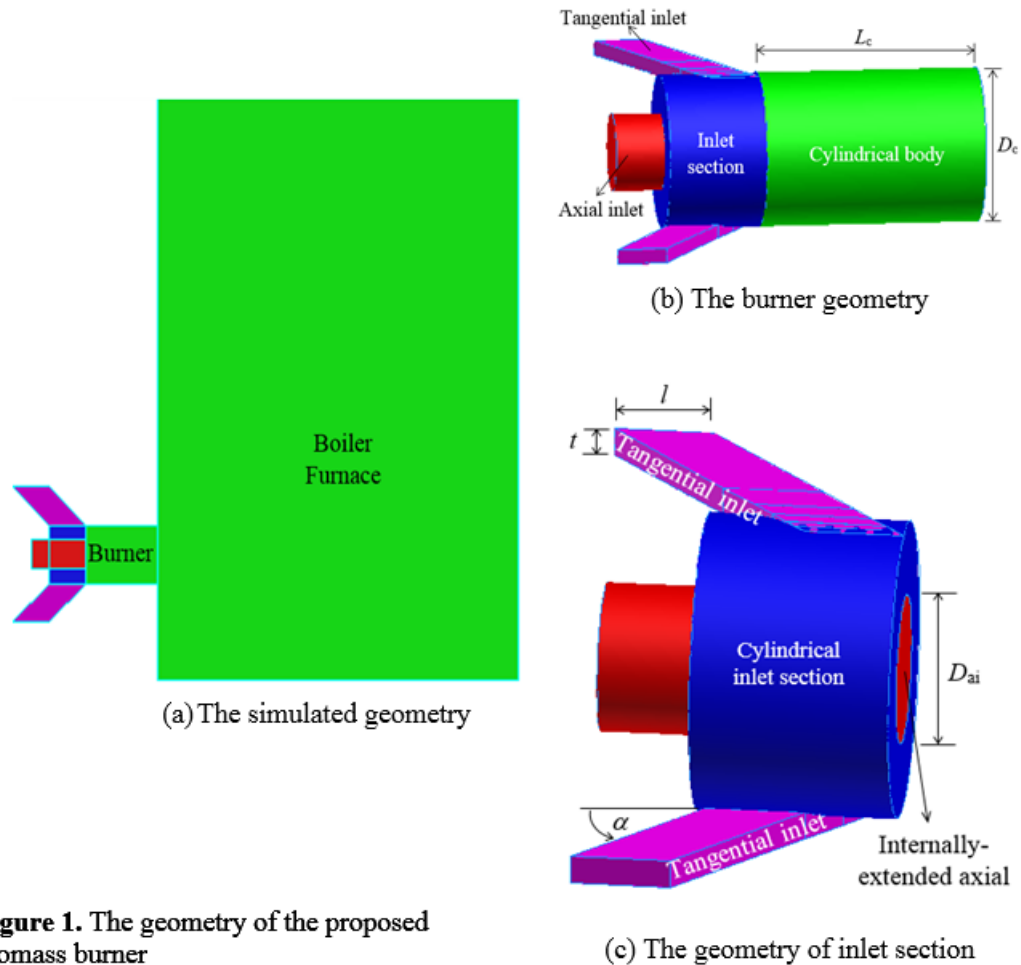

**Figure 1.** The geometry of the proposed biomass burner

The simulation was conducted under the constant burner Reynolds number ( $N_{Re}$ ) and initial tangential intensity ( $I_{it}$ ). All the simulations in this study were conducted on the  $N_{Re}$  of 69,000 and  $I_{it}$  of 3.5. The burner Reynolds number ( $N_{Re}$ ) was calculated using the following formula.

$$N_{Re} = (\rho D_c \bar{u}) / \mu \quad (3)$$

where  $\rho$  is air density,  $D_c$  is burner diameter,  $\bar{u}$  is average magnitude velocity and  $\mu$  is air viscosity.

While, the initial tangential intensity ( $I_{it}$ ) was defined as the ratio of the mass flux entering the tangential inlet to the mass flux of the burner cylinder. Mathematically,  $I_{it}$  could be stated by the following equation

$$I_{it} = (A_c / A_t) \dot{m}_t^2 / (\dot{m}_t + \dot{m}_c)^2 \quad (4)$$

where,  $A_c$  and  $A_t$  are the surface area of burner cylinder and tangential inlet, respectively. Meanwhile  $\dot{m}_t$  and  $\dot{m}_c$  are the mass flowrate entering the tangential inlet and the mass flowrate entering the burner cylinder.

## 2.2 Fluid flow model

Theoretically, fluid dynamics characteristics in a chamber are governed by mass and momentum conservation equations. For constant fluid density ( $\rho$ ) and viscosity ( $\mu$ ), the conservation equations of mass and momentum for turbulent flow were given by the equations (5) to (8). The equations are often known as the Reynolds Average Navier-Stokes (RANS) equations.

$$\frac{\partial \rho}{\partial t} = \frac{\partial \rho \bar{u}_x}{\partial x} + \frac{\partial \rho \bar{u}_y}{\partial y} + \frac{\partial \rho \bar{u}_z}{\partial z} \quad (5)$$

$$\rho \frac{\partial \bar{u}_x}{\partial t} + \sum_{i=x}^{y,z} \rho \bar{u}_i \frac{\partial \bar{u}_x}{\partial i} = -\frac{\partial \bar{p}}{\partial x} + \sum_{i=x}^{y,z} \frac{\partial}{\partial i} \left( \mu_{\text{eff}} \frac{\partial \bar{u}_x}{\partial i} \right) + \rho g_x \quad (6)$$

$$\rho \frac{\partial \bar{u}_y}{\partial t} + \sum_{i=x}^{y,z} \rho \bar{u}_i \frac{\partial \bar{u}_y}{\partial i} = -\frac{\partial \bar{p}}{\partial y} + \sum_{i=x}^{y,z} \frac{\partial}{\partial i} \left( \mu_{\text{eff}} \frac{\partial \bar{u}_y}{\partial i} \right) + \rho g_y \quad (7)$$

$$\rho \frac{\partial \bar{u}_z}{\partial t} + \sum_{i=x}^{y,z} \rho \bar{u}_i \frac{\partial \bar{u}_z}{\partial i} = -\frac{\partial \bar{p}}{\partial z} + \sum_{i=x}^{y,z} \frac{\partial}{\partial i} \left( \mu_{\text{eff}} \frac{\partial \bar{u}_z}{\partial i} \right) + \rho g_z \quad (8)$$

$$\mu_{\text{eff}} = \mu + \mu_t \quad (9)$$

The fluid dynamics equations system above had 5 dependent variables, namely the mean pressure ( $\bar{p}$ ), average velocity of x direction ( $\bar{u}_x$ ), the average velocity of y direction ( $\bar{u}_y$ ), the average velocity of z direction ( $\bar{u}_z$ ) and the turbulent viscosity ( $\mu_t$ ), while the available equations were only 4. There are three methods to solve the above RANS equations system, namely Direct Numerical Solution (DNS) method, modeling method (RANS based model) and Large Eddy Simulation (LES) method. In this research, the solution method used was the modeling with a  $k$ - $\varepsilon$  standard turbulent model. The model was reported by some researchers, has sufficient capability in modeling turbulent swirl flows, especially in low swirl numbers, and has low computational efforts [10, 11].

In the  $k$ - $\varepsilon$  turbulent model, turbulent viscosity ( $\mu_t$ ) is expressed by the equation

$$\mu_t = C_\mu \rho (k^2 / \varepsilon) \quad (10)$$

which  $c_\mu$  is the empirical constant,  $\rho$  is the fluid density,  $k$  is the specific turbulent kinetic energy and  $\varepsilon$  is the dissipation rate of specific turbulent kinetic energy. The occurrence of variables  $k$  and  $\varepsilon$ , resulting in the number of dependent variable on the system of equation is increased to 6 variables, namely ( $\bar{p}$ ), ( $\bar{u}_x$ ), ( $\bar{u}_y$ ), ( $\bar{u}_z$ ),  $k$  and  $\varepsilon$ , while the number of conservation equations available are still 4 equations.

In order to solve simultaneously the above equations system, two additional conservation equations are needed, those are conservation equations for variables  $k$  and  $\varepsilon$ . The formulations of both conservation equations are given by equation (11) and (12).

$$\rho \frac{\partial k}{\partial t} + \sum_{i=x}^{y,z} \rho \bar{u}_i \frac{\partial k}{\partial i} = \sum_{i=x}^{y,z} \frac{\partial}{\partial i} \left( \frac{\mu_{\text{eff}}}{\sigma_k} \frac{\partial k}{\partial i} \right) + G_k - \rho \varepsilon \quad (11)$$

$$\rho \frac{\partial \varepsilon}{\partial t} + \sum_{i=x}^{y,z} \rho \bar{u}_i \frac{\partial \varepsilon}{\partial i} = \sum_{i=x}^{y,z} \frac{\partial}{\partial i} \left( \frac{\mu_{\text{eff}}}{\sigma_\varepsilon} \frac{\partial \varepsilon}{\partial i} \right) + C_{\varepsilon 1} \frac{\varepsilon}{k} G_k - C_{\varepsilon 2} \rho \frac{\varepsilon^2}{k} \quad (12)$$

Thus for  $k$ - $\varepsilon$  turbulent models, fluid dynamics characteristics are simulated by the equations (5) to (8) and equations (11) and (12). Variables  $G_k$  in the above equations is given by the equations (13), while the constant values of each parameter are as follow  $C_\mu = 0.09$ ,  $\sigma_k = 1.0$ ,  $\sigma_\varepsilon = 1.3$ ,  $C_{\varepsilon 1} = 1.44$  and  $C_{\varepsilon 2} = 1.92$  [12].


$$G_k = 2\mu_t \left[ \sum_{i=x}^{y,z} \left( \frac{\partial \bar{u}_i}{\partial i} \right)^2 \right] + \mu_t \left[ \left( \frac{\partial \bar{u}_x}{\partial y} + \frac{\partial \bar{u}_y}{\partial x} \right)^2 + \left( \frac{\partial \bar{u}_x}{\partial z} + \frac{\partial \bar{u}_z}{\partial x} \right)^2 + \left( \frac{\partial \bar{u}_y}{\partial z} + \frac{\partial \bar{u}_z}{\partial y} \right)^2 \right] \quad (13)$$

### 3. Results and discussion

#### 3.1 Effect of tangential inlet cross-sectional shape

The rectangular tangential inlet shape provided a higher turbulence intensity than the circular shape, that was 238.7 versus 208.4%. The predicted heat transfer coefficient generated from the rectangular shape was also larger than the circular ones. The average values of heat transfer coefficient for both of tangential inlet shapes, using the Diffus-Boelter equation, were 32.22 and 29.29 W/m<sup>2</sup>K, respectively. The heat transfer process in the burner has positive correlation to the devolatilization and the combustion process which occurred in the burner.

The rectangular tangential inlet shape resulted in a longer backflow penetration than the circular ones, those were 0.145 and 0.11 m. The comparison of the generated backflow penetration by the two tangential inlet shapes was given in Figure 2. Backflow penetration in this figure was indicated by a negative axial velocity contour. From the picture it was seen that the backflow penetration depth generated by the rectangular tangential inlet shape was longer than the circular shape.

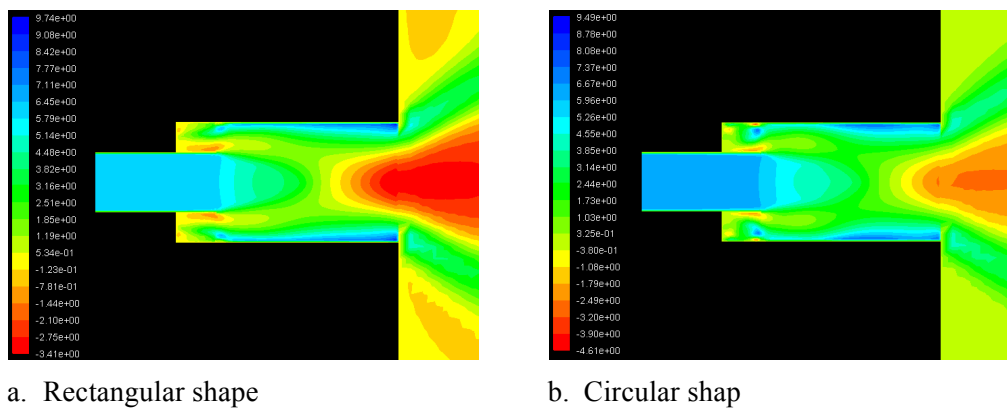

**Figure 2.** Axial velocity contour for both tangential inlet cross section shapes

In the case of the flow resistance, the rectangular tangential inlet shape produced a higher static pressure than the circular ones. The average static pressure in the burner cylinder for both tangential inlet shapes are 51.6 and 42.2 Pascal. The higher the static pressure of the fluid flow, the higher the fluid flow resistance was. It leads to the higher power consumption of the air blower. The comparison of the fluid dynamics performances for both of the tangential inlet shapes were summarized in Table 1.

**Table 1.** Comparison of fluid dynamics performances of rectangular and circular tangential inlet shapes.

Performance parameter	Tangential inlet shape	
	Circular	Recta
Turbulence intensity, %	208.4	238.7
Heat transfer coef., W/m <sup>2</sup> K	29.29	32.22
Backflow penetration, m	0.11	0.145
Static pressure, Pascal	42.2	51.6

#### 3.2 Effect of tangential inlet orientation angle


The tangential inlet angle also affects the fluid dynamics characteristics in the burner cylinder. When the orientation of tangential inlet configures a certain angle with the axial axis, then the stream that is formed from the inlet will be tangentially oriented. The larger the tangential inlet angle, the greater the tangential flow frequency and vice versa.


Research on the influence of tangential inlet orientation angle to the burner performance was reported by Ziqiang et al (2016). Of the 3 tangential inlet orientation angles used, ie, 15<sup>0</sup>, 30<sup>0</sup> and 45<sup>0</sup>, Ziqiang stated that the best tangential inlet orientation angle is an angle of 30<sup>0</sup>. At that angle, the largest recirculation zones and uniformly dispersed fuels in the furnace were produced [13].

To see the effect of the other orientation angle in the range of  $15^{\circ}$  to  $45^{\circ}$ , the tangential inlet angle was varied every  $5^{\circ}$ . In addition, the orientation angles greater than  $45^{\circ}$ , namely  $60^{\circ}$ ,  $75^{\circ}$  and  $90^{\circ}$ , were also simulated. Besides being evaluated based on the recirculation flow pattern, the burner fluid dynamics performances were also evaluated based on other variables such as turbulence intensity, heat transfer and static pressure.

From all tangential inlet orientation angles simulated, the backflow from the furnace to the internal burner always exists, except for the orientation angle of  $15^{\circ}$ . The tendency of penetration depth could be stated as the greater the orientation angle, the shorter the backflow penetration depth and vice versa. There is no backflow from the furnace to the internal burner, at the orientation angle of  $15^{\circ}$ , is due to the low frequency of the tangential flow that is formed at this angle.


At the orientation angle of  $20^{\circ}$ , the backflow penetration approaches the axial inlet output. The mixture of the incoming flow and backflow recirculate to the furnace through the area near the wall. At orientation angles of  $25^{\circ}$  and  $30^{\circ}$ , although the depth of backflow penetration is close to the axial inlet output, but the mixture of the two streams tends to lead to the tangential inlet section. For the larger orientation angles ( $35^{\circ}$ ,  $40^{\circ}$ ,  $45^{\circ}$ ,  $60^{\circ}$ ,  $75^{\circ}$  and  $90^{\circ}$ ), the depth of backflow penetration is shorter. A comparison of the backflow pattern in the burner cylinder for some tangential inlet orientation angles is given in the figure 3.

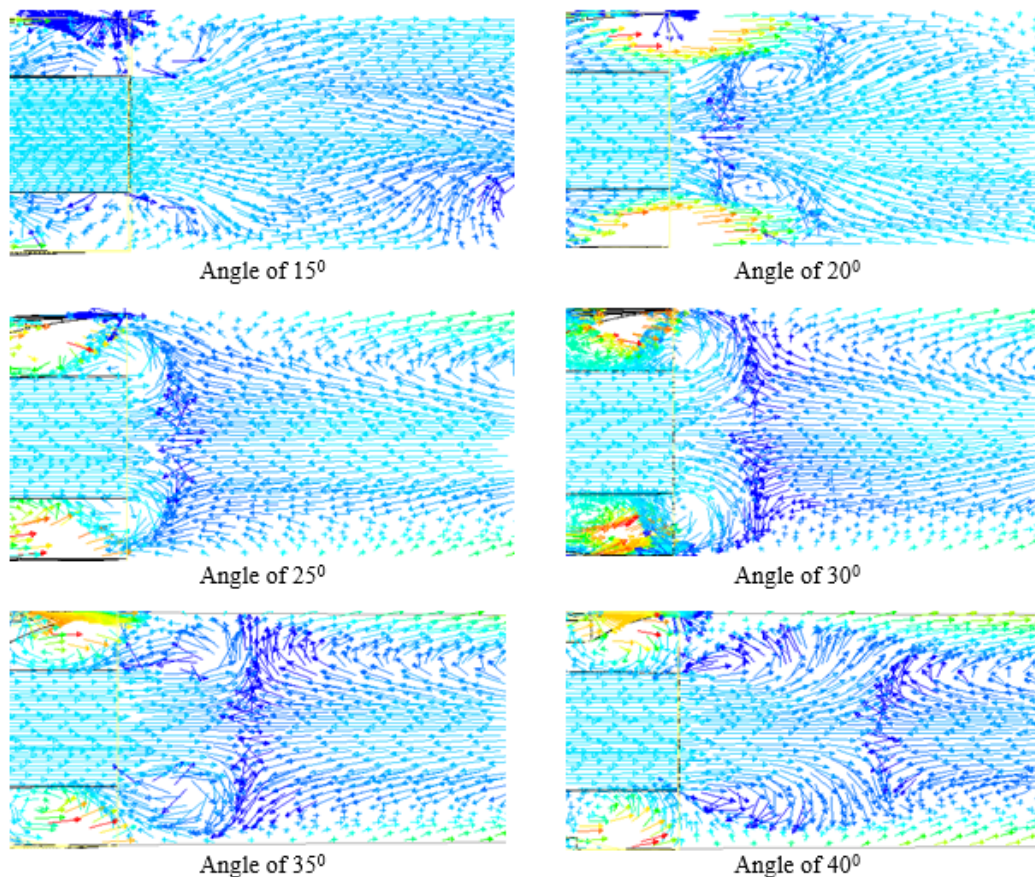

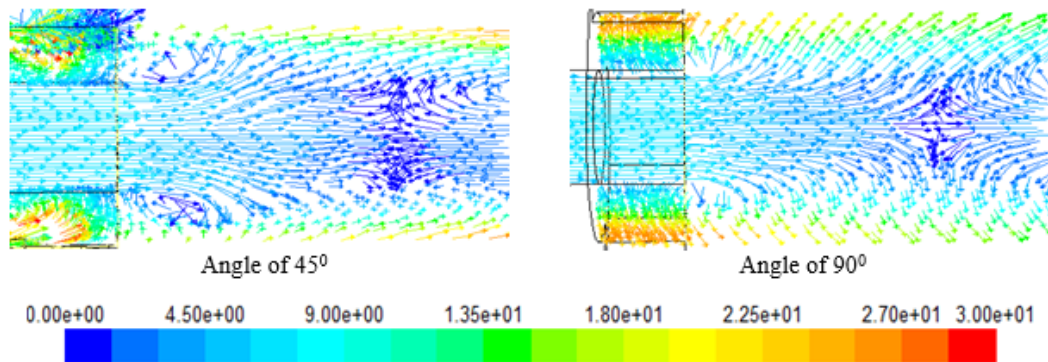

**Figure 3.** Recirculation flow pattern in burner cylinder for various tangential inlet orientation angles

In term of mixing intensity, the tangential inlet with orientation angle  $20^\circ$  yielded the highest turbulence intensity value. This condition is related to the formation of internal recirculation at the mixing zone of the two flow streams. In addition, on this orientation angle, the static pressure was relatively low and the heat transfer rate was relatively high, as shown in figure 4. This indicates that the burner with the tangential inlet angle of  $20^\circ$  has the potential to produce the best fluid dynamics performance in the burner. It will allow the devolatilization process and a stable ignition occurs in the burner.

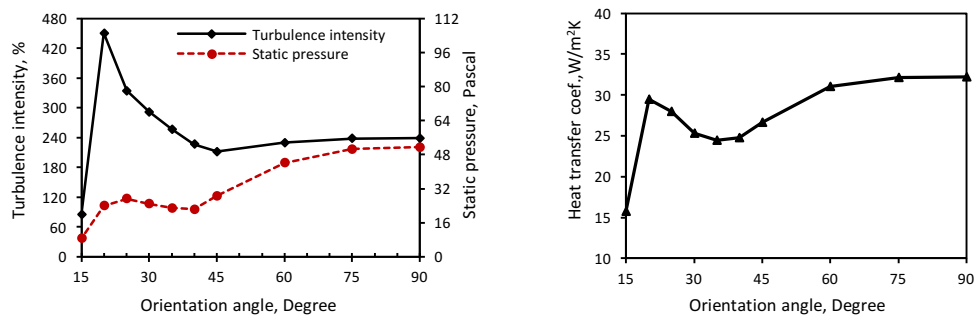

**Figure 4.** Profile of turbulence intensity, static pressure and heat transfer coefficient in burner cylinder for several tangential inlet orientation angles.

#### 4. Conclusion

The fluid dynamics characteristics in the proposed biomass burner design have been simulated using a standard  $k-\epsilon$  turbulent model. The simulation results showed that orientation angle and shape of the tangential inlet influence significantly the fluid dynamic characteristics in the burner cylinder.

At certain orientation angle, the tangential inlet tends to produce back flow from furnace to the internal burner. The tendency of back flow penetration depth could be stated as the greater the orientation angle, the shorter the backflow penetration depth. The turbulence intensity is also inversely proportional to the tangential inlet orientation angle, while the static pressure and heat transfer coefficient are directly proportional to it. The rectangular tangential inlet shape produces the deeper backflow penetration depth, the higher turbulence intensity and the greater heat transfer rate, but it requires a higher blower power than the circular shape to overcome the greater static pressure.

The above results have revealed that the best tangential inlet orientation angle of the proposed biomass burner is  $20^\circ$  and the appropriate tangential inlet shape is rectangular. Under these conditions, the fluid dynamics characteristics in the burner cylinder potentially produce the best burner performance.



### Acknowledgments

We would like to thank to the Ministry of Research, Technology and Higher Education of Indonesia for the awarded research fund to this research on the decentralization research scheme.

### References

- [1] Dahl J dan Obernberger I 2004 *2nd World Conference on Biomass for Energy, Industry and Climate Protection* Rome Italy
- [2] Kops S M B and Malte P C 2004 *Final Technical Report, Energy and Environmental Combustion Laboratory* Department of Mechanical Engineering University of Washington
- [3] Siyi L, Bo X, Zhiquan H, Liu S and Maoyun H 2010 *Energy Conversion and Management* **51** 2098-2102
- [4] Momeni M, Yin C, Kær S K, Hansen T B, Jensen P A and Glarborg P 2013 *Energy & Fuels* **27** 507–14
- [5] Arnao J H S, Ferreira D J O, Santos C G, Alvarez J E, Rangel L P and Park S W 2015 *International Journal of Mechanical, Aerospace, Industrial, Mechatronic and Manufacturing Engineering* **9** (5) 798-801
- [6] Nag P K 2002 *Power Plant Engineering* 2<sup>nd</sup> edition (Singapore: McGraw Hill Company)
- [7] Paulrud S dan Nilsson C 2004 *Fuel* **83** 813-21
- [8] Al-Abdeli Y M and Masri A R 2015 *Experimental Thermal and Fluid Science* (Accepted Manuscript)
- [9] Ansys Incorporation. 2013 *Solver Theory* (United States: Canonsburg)
- [10] Nemoda S, Bakic V, Oka S, Zivkovic G and Crnomarkavic N 2005 *Int. J. Heat Mass Transfer* **48** 4623–32
- [11] Vazquez J A R 2012 *Thesis* University of Zaragoza Spain
- [12] Yazid B 2017 *Rekayasa Komputasi Aliran Turbulen Multidimensi* First edition (Bandung: ITB Press) pp 18-24
- [13] Ziqiang L V, Guangqiang L and Yingjie L 2016 *International Journal of Smart Home* **10** 171-80

Scope

Journal of Physics: Conference Series (JPCS) is an Open Access proceedings journal provides a fast, versatile and cost-effective proceedings publication service.

Subjects

- Accelerators, beams and electromagnetism
Astrophysics and astroparticles
Atomic and molecular physics
Biological physics
Chemical physics and physical chemistry
Computational science
Condensed matter: electrical, magnetic and optical
Condensed matter: structural, mechanical & thermal
Education and communication
Electronics and devices
Earth science
Environment and Energy
Engineering and Extreme Manufacturing
Fluids and fluid dynamics
History of science and commemorative events
Gravitation and cosmology
Instrumentation and measurement
Materials physics, materials analysis and characterization
Mathematics and Mathematical physics
Medical physics
Nanoscale science and low-D systems
Nuclear physics
Optics, quantum optics and lasers
Particle physics and field theory
Plasma and fusion physics
Quantum gases, liquids and solids
Quantum information and quantum mechanics
Semiconductors
Soft matter, liquids and polymers
Statistical physics and nonlinear systems
Vacuum science, technology and applications
Superconductivity
Surfaces, interfaces and thin films



JOURNAL LINKS

- Journal home
Journal Scope
Information for organizers
Information for authors
Contact us
Reprint services from Curran Associates

IOPSCIENCE

- Journals
Books
IOP Conference Series
About IOPscience
Contact Us
Developing countries access
IOP Publishing open access policy
Accessibility

IOP PUBLISHING

- Copyright 2024 IOP Publishing
Terms and Conditions
Disclaimer
Privacy and Cookie Policy

PUBLISHING SUPPORT

- Authors
Reviewers
Conference Organisers



This site uses cookies. By continuing to use this site you agree to our use of cookies.



## Journal of Physics: Conference Series

---

### Table of contents

#### Volume 1090

2018

[◀ Previous issue](#)   [Next issue ▶](#)

#### **International Conference on Computation in Science and Engineering 10-12 July 2017, Bandung, Indonesia**

Accepted papers received: 20 August 2018

Published online: 28 September 2018

[Open all abstracts](#)

---

### Preface

**OPEN ACCESS**

[International Conference on Computation in Science and Engineering](#)

[+ Open abstract](#)

[View article](#)

[PDF](#)

011001

**OPEN ACCESS**

011002

[Peer review statement](#)

[+ Open abstract](#) [View article](#) [PDF](#)

---

## Papers

**OPEN ACCESS**

012001

[Current and Future Computation in Nuclear Engineering](#)

Hiroshi Sekimoto

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012002

[By-product group benefits of non-kin resource-sharing in vampire bats](#)

R Donepudi and R Ramaswamy

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012003

[AMIR CPU: World's First and Only 32-bit Softcore Processor in Schematic on Freeware Platform](#)

Muhammad Nasir Ibrahim, Namazi Azhari, Adam Baharum, Mariani Idroas, Uswah Khairudin, Johari Kassim and Mohar Muhammad

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012004

[Effect of isotope enrichment on performance of lead-lithium blanket of inertial fusion reactor](#)

Masatoshi Kondo, Yuu Nakajima, Teruya Tanaka and Takayoshi Norimatsu

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012005

The Band Structure of a Rare Earth Element of Promethium (III) Oxide ( $\text{Pm}_2\text{O}_3$ ) Calculated Using Density Functional Theory

Nur Afifah Mohd Rafi and Ahmad Nazrul Rosli

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012006

Modified CANDLE Burnup Calculation System, Its Evolution, and Future Development

Zaki Su'ud, M. Ilham, Nina Widiawati and Hiroshi Sekimoto

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012007

Effects of tangential inlet shape and orientation angle on the fluid dynamics characteristics in a biomass burner

Pasymi, Y W Budhi and Y Bindar

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012008

Experimental Investigation and Numerical analysis of  $\text{SO}_2$  Removal Using Polypropylene Membrane Contactor

D. Ariono, A.N. Hakim and I.G. Wenten

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012009

Simulation of Semi-Autogenous Grinding (SAG) Mill using Circular-Disks-based Model

R. Sari, P. M. Widartingsih, M. A. Martoprawiro, L. Hendrajaya and S. Viridi

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012010

Analysis, Control and Circuit Design of a Novel Chaotic System with Line Equilibrium

A Sambas, S Vaidyanathan, M Mamat, M Sanjaya WS, S H Yuningsih and K Zakaria

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012011

Comparative Evaluation on Several Reactor Type of Actinide Closed-Cycle Schemes

Sidik Permana, Asril Pramutadi, Syeilendra Pramuditya and Dwi Irwanto

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012012

Experimental and numerical investigation of cooling performance of a cold storage in a pharmaceutical industry

A Sulamo, Fxn Soelami and Y Bindar

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012013

Mo-99 Isotope Production Calculation of SAMOP Reactor Experimental Facility

M. Iqbal Farezza W and Syarip

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS** 012014

On The Markov Chain Monte Carlo Convergence Diagnostic of Bayesian Finite Mixture Model for Income Distribution

I Susanto, N Iriawan, H Kuswanto, Suhartono, K Fithiasari, B S S Ulama, W Suryaningtyas and A A Pravitasari

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012015

[Numerical Method and Laboratory Experiment of RC Circuit using Raspberry Pi Microprocessor and Python Interface](#)

W. S. Mada Sanjaya, Dyah Anggraeni, Aceng Sambas and Rena Denya

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012016

[Finite Difference Methods for Simulation of Water Waves Generated by Moving Topography](#)

Sudi Mungkasi and Nikenasih Binatari

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012017

[Approximate Solution of Riccati Differential Equations and DNA Repair Model with Adomian Decomposition Method](#)

Rahmat Al Kafi, Bariqi Abdullah and Sri Mardiyati

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012018

[An Evaluation of A Solid Biomass Cook Stove in Small Household Industry](#)

Suhartono, Fitria Gasela, Anis Khoirunnisa and Suharto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012019

[Numerical Study of Radiation Heat Transfer on Supplementary Firing with Gas Turbine Load Variations](#)

Muhammad Haidar Fakhri, A. Teguh Hady and S. Arrad Ghani

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012020

[Analysis Service Engineering Development Lifecycle: an Object-Oriented Approach](#)

Ade Hodijah

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012021

[Design Study of 600 MWt Long Life Modular Gas Cooled Fast Reactors](#)

M.A. Fareha, Ratna D. Syarifah, Zaki Su'ud and Neny Kurniasih

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012022

[Optimization of texture of the multiple textured lubricated contact with slip](#)

M Muchammad, N Sinaga, B Yunianto, Arijanto, M F Noorkarim and M Tauviqirrahman

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012023

[Solving Unconstrained Global Optimization Problem Using Parameter Free Filled Function in Cooperation with Jameson Gradient Based Method](#)

Herlina Napitupulu, Ismail Bin Mohd, Endang Soeryana Hasbullah, Sukono and Sudradjat Supian

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012024

[Design improvement of table fan blade in term of its vibration characteristic using finite element method](#)

O Kurdi, S A Widyanto, A Suprihanto, D B Wibowo, M A Mat Norman and G P Mohana Sundram

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012025

3D simulation of the lubrication film in journal bearing using Fluid-Structure Interaction (FSI)

S Ramdhani, I Haryanto and M Tauviqirrahman

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012026

The application of genetic algorithm optimization on quadratic investment portfolio without a risk-free asset under Value-at-Risk

Sukono, S. Supian, H. Napitupulu, Yuyun Hidayat and Adam Sukma Putra

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012027

Effect of texture shape on the hydrodynamic lubrication performance of the sliding textured contact: a numerical approach

Susilowati, M Tauviqirrahman, J Jamari and AP Bayuseno

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012028

Numerical Study of Nuclear Ground State Properties of Fuel Elements of Nuclear Reactor by Using *Skyrme-Hartree-Fock-Bogoliubov* Method

Yacobus Yulianto, Santi Hatmanti and Zaki Su'ud

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012029

Frontier Orbitals of Dehydrogenated Tetrahydrocurcumin in Water Solvent: A Theoretical Study

Lusia S. P. Boli, Vera Khoirunisa, Adhitya G. Saputro, Mohammad K. Agusta, Febdian Rusydi, Heni Rachmawati and Hermawan K. Dipojono

[+ Open abstract](#) [View article](#) [PDF](#)



---

**OPEN ACCESS** 012030

Hybrid Cryptosystem Implementation Using IDEA and Knapsack Algorithm for Message Security

Dian Rachmawati, Maya Silvi Lydia and Wynda Arianni Siregar

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012031

Source Term Analysis of SAMOP Reactor Experimental Facility

L Wahid, M I Farezza W and Syarip

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012032

Neutronic Analysis of SAMOP Reactor Experimental Facility Using SCALE Code System

Dedy P Hermawan, Rionaldy and Syarip

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012033

Neutronic Analysis of UN-PuN Fuel use FI-ITB-CHI Code for 500MWth GFR Long Life Without Refueling

Ratna Dewi Syarifah, Zaki Su'ud, Khairul Basar and Dwi Irwanto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012034

Small Signal Stability Analysis of Wind Turbine Penetration in Sulselrabar Interconnection System

B Mustadir Darusman, Ansar Suyuti and Indar Chaerah Gunadin

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012035

Expansion of Filter Design from GHz to THz with Metamaterial Hexagonal Split Ring Resonator

M. F. Kurnia, R.F. Syahputra and Saktioto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012036

Analytical Method of Atomic Density Determination of Uranyl Nitrate Solution

Syarip and Tegas Sutondo

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012037

Driver Drowsiness Detection Based on Face Feature and PERCLOS

Suhandi Junaedi and Habibullah Akbar

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012038

Dynamics, Circuit Design and Fractional-Order Form of a Modified Rucklidge Chaotic System

A Sambas, S Vaidyanathan, M Mamat, M Sanjaya WS, S H Yuningsih, K Zakaria and Subiyanto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012039

Evaluation of downscaled near-surface wind over maritime continent based on stations measurement

Arnida L. Latifah, Aryo Cokrowatianto and Didit Adytia

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012040

Optimization of time-dose fractionation radiotherapy scheme by simulated annealing with consideration of biological factor

A N Hasto and W Rena

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012041

Inertia effect of textured lubricated contact on the bearing performance using CFD approach

F Hilmy, M Muchammad, M Tauvqirrahman and J Jamari

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012042

Numerical evaluation of number of textures in slip-textured lubricated contact

E Yohana, W K Ajie and M Tauvqirrahman

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012043

Intelligent Software Product Line For Supply Chain

Ahmad Nurul Fajar, Ditdit Nugeraha Utama and Gunawan Wang

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012044

Design of Real Time Facial Tracking and Expression Recognition for Human-Robot Interaction

W.S. Mada Sanjaya, Dyah Anggraeni, Atip Juwardi and Madinatul Munawwaroh

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012045

[The effect of heterogeneity in ion-exchange membrane structure on Donnan Exclusion](#)

K. Khoiruddin, Danu Ariono, S. Subagjo and I Gede Wenten

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012046

[Speech Recognition using Linear Predictive Coding \(LPC\) and Adaptive Neuro-Fuzzy \(ANFIS\) to Control 5 DoF Arm Robot](#)

W.S. Mada Sanjaya, Dyah Anggraeni and Ikhsan Purnama Santika

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012047

[A finite volume method for solving the gravity wave-model equations](#)

Cecilia Heru Purwitaningsih and Sudi Mungkasi

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012048

[Inverse Modeling of Gravity Data with Two Layers Density in Sedimentary Basin Structure](#)

Eko Januari Wahyudi and Wawan Gunawan A. Kadir

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012049

[Comparison of absorbed dose distribution 10 MV photon beam on water phantom using Monte Carlo method and Analytical Anisotropic Algorithm](#)

Ridwan Ramdani, Freddy Haryanto and Yudha Satya Perkasa

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012050

Numerical solutions to a parabolic model of two-layer fluids

Sudi Mungkasi and Friska Dwi Mesra Mangadil

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012051

Vortex Formation on Horizontal Axis Wind Turbine with Splitted winglets

Rizal Ibnu Syifa and Setyo Nugroho

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012052

Analysis of Fouling Mechanism in Polysulfone based Ultrafiltration Membrane during Peat Water Filtration

Danu Ariono and Anita Kusuma Wardani

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012053

In Silico Study of Phospholipids as An Oral Insulin Delivery System

Nanik Rahmawati Fuadah and Rukman Hertadi

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012054

Ab Initio Study on Electronic Structure of Some Imidazole Derivatives and Its Correlation with Corrosion Inhibition Properties

C D D Sundari, S Setiadji, B W Nuryadin, R Syafia, A F Huda and A L Ivansyah

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012055

[Computational Study of Inclusion Complexes Between Omeprazole Enantiomer with Hydroxypropyl- \$\beta\$ -Cyclodextrin](#)

S Setiadji, C D D Sundari, B W Nuryadin, H Zayyinnisya, R Cahyandari and A L Ivansyah

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012056

[The reasoning for low ground magnetic anomaly reveal by model numeric and data on the field](#)

Agus Laesanpura, Warsa and S. Tedy

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012057

[Alternating Least Square Method for Decomposing Dance Golek Menak Tensor Data](#)

Joko Sutopo

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012058

[Influence of Electrical Properties on Radiation and Emission to Pinch Radius Thermal Plasma Device](#)

R F Syahputra, R Farma, Saktioto, N D Nawi, N A Rashid, F D Ismail and J Ali

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012059

[Service Desk Implementation with Information Technology Infrastructure Library Framework \(Study Case Financial Company\)](#)

Dwi Handoko and Abba Suganda Girsang

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012060

[Evaluation of ISO 27001 implementation towards information security of cloud service customer in PT. IndoDev Niaga Internet](#)

Ahmad Nurul Fajar, Hendy Christian and Abba Suganda Girsang

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012061

[Fuel Breeding Analysis On Low Moderated Fuel Ratio Based On Actinides Closed Water-Cooled Thorium Reactor](#)

Sidik Permana, Syeilendra Pramuditya and Dwi Irwanto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012062

[Implementation of Rivest Shamir Adleman Cryptographic Algorithms and Techniques of Steganography First of File for Message Security](#)

Dian Rachmawati and Yeni Rosalin Munthe

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012063

[Isogeometric Analysis for Thin Square Bending Plate using Collocation Method](#)

Irwan Katili, Budianto Jaya, Imam Jauhari Maknun and Mulia Orientilize

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012064

[Numerical Simulation on Solving Three-Dimensional Global Optimization Problems in cooperation of Filled Function and Search Direction](#)

Herlina Napitupulu, Ismail Bin Mohd, Yuyun Hidayat, Sukono and Sudradjat Supian

[+ Open abstract](#) [View article](#) [PDF](#)

- 
- OPEN ACCESS** 012065  
Numerical simulation of breaking regular and irregular wave propagation above a sloping bottom  
Didit Adytia, Semeidi Husrin and Adiwijaya  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012066  
Thermal analysis of composite disc-brake based on finite element method  
S Riyadi, Sulistyono and M Tauviquirrahman  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012067  
CFD analysis of texture depth effect on the performance of hydrodynamic lubricated bearing  
M Muchammad, F Hilmy, M Tauviquirrahman, J Jamari and DJ Schipper  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012068  
Numerical optimization of load support of the single textured lubricated contact with boundary slip  
M Tauviquirrahman, M F Noorkarim, Arijanto and Muchammad  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012069  
Optimization of Enemy's Behavior in Super Mario Bros Game Using Fuzzy Sugeno Model  
Nanang Ismail, R M Husnul, M Nurul Subkhi, Miftahudin and Eki A Z Hamidi  
[+ Open abstract](#) [View article](#) [PDF](#)



**OPEN ACCESS**

012070

[Colored Object Sorting using 5 DoF Robot Arm based Artificial Neural Network \(ANN\) Method](#)

W. S. Mada Sanjaya, Dyah Anggraeni, Madinatul Munawwaroh, M. Yusuf S. Nurasyidiek, Darmawan Setia Rahayu, Ahmad Samsudin, Ikhsan Purnama Santika and Endah Kinarya Palupi

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012071

[Neutronic Comparison Study Between Pb\(208\)-Bi and Pb\(208\) as a Coolant In The Fast Reactor With Modified CANDLE Burn up Scheme.](#)

Nina Widiawati, Zaki Suud, Dwi Irwanto and Hiroshi Sekimoto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012072

[On The Bernoulli Mixture Model for Bidikmisi Scholarship Classification with Bayesian MCMC](#)

W Suryaningtyas, N Iriawan, K Fithriasari, BSS Ulama, I Susanto and AA Pravitasari

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012073

[Preliminary Study of Long-life GFR 100 and 150 MWth](#)

S.C. Pattipawaej and Z. Su'ud

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012074

[Flory-Huggins Based Model to Determine Thermodynamic Property of Polymeric Membrane Solution](#)

P T P Aryanti, D Ariono, A N Hakim and I G Wenten

**OPEN ACCESS**

012075

[Tidal Current Circulation in Western Bali Sea Using a 2-D Hydrodynamic Model](#)

D A Widiawan and S Nurdjaman

[+ Open abstract](#) [View article](#) [PDF](#)**OPEN ACCESS**

012076

[Optimizing and Implementation Contactless Tag-Reader System for Smart Classroom and Laboratory Access](#)

Rida Ariyanti, Elyas Palantei and Intan Sari Areni

[+ Open abstract](#) [View article](#) [PDF](#)**OPEN ACCESS**

012077

[The Effect of Grounding Resistance About Back Flashover on 150 KV Transmission Network in Main Station of Sungguminasa - Tallasa \(Makassar\)](#)

Naomi Lembang, Salama Manjang and Ikhlas Kitta

[+ Open abstract](#) [View article](#) [PDF](#)**OPEN ACCESS**

012078

[A Numerical Investigation of the Friction Contact of an Unfilled Styrene Butadiene Rubber by a Blade Sliding Indentation](#)

B. Setiyana, M. Khafidh, R. Ismail, J. Jamari and D.J. Schipper

[+ Open abstract](#) [View article](#) [PDF](#)**OPEN ACCESS**

012079

[Design Project Management System Based on SOA Approach](#)

Abba Suganda Girsang, Fahmi Jafar and Ahmad Nurul Fajar

[+ Open abstract](#) [View article](#) [PDF](#)**OPEN ACCESS**

012080

[The \*Hybrid\* Model Algorithm on Sharia Insurance](#)

Rini Cahyandari, Riva Lesta Ariany, Sukono and Yudha Satya Perkasa

[+ Open abstract](#) [View article](#) [PDF](#)**OPEN ACCESS**

012081

[Development of Ebola Vaccine Candidate by in Silico from Glikoprotein \(GP\) Gene of Ebola Zaire Virus](#)

Yani Suryani, Opik Taupiqurrohman, Sri Aryanti, Moh. Nurul Subkhi and Epa Paujiah

[+ Open abstract](#) [View article](#) [PDF](#)**OPEN ACCESS**

012082

[Appropriateness of Water Hyacinth and Rice Husk as Filler Materials for Resin Polymer Insulation](#)

Trisna Amelia Fitriah, Salama Manjang and Ikhlas Kitta

[+ Open abstract](#) [View article](#) [PDF](#)



# CERTIFICATE

THIS CERTIFICATE IS PROUDLY  
PRESENTED TO

**Pasymi**

*in recognition of his/her valuable contribution as*

**Presenter**

- in -

**International Conference on Computation in Science and Engineering 2017**

East Hall of ITB,  
Bandung, Indonesia  
July, 10-12th, 2017

DATE AND LOCATION

Prof. Dr. Zaki Su'ud

ICCSE 2017 CHAIRMAN



Organized by:  
Department of Physics,  
Faculty of Mathematics and Natural Sciences,  
Institut Teknologi Bandung, Indonesia

Supported by:  
Department of Physics,  
UIN Sunan Gunung Djati,  
Bandung, Indonesia

