

PAPER • OPEN ACCESS

## Studies of Carbonization Process on the Production of Durian Peel Biobriquettes with Mixed Biomass Coconut and Palm Shells

To cite this article: Ellyta Sari *et al* 2018 *IOP Conf. Ser.: Mater. Sci. Eng.* **316** 012021

View the [article online](#) for updates and enhancements.

### Related content

- [Photoluminescence of Reduced Graphene Oxide Prepared from Old Coconut Shell with Carbonization Process at Varying Temperatures](#)  
Dwi Noor Jayanti, Ananda Yogi Nugraheni, Kurniasari et al.
- [The Flexible Carbon Activated Electrodes made from Coconut Shell Waste for Supercapacitor Application](#)  
E Taer, W S Mustika, Agustino et al.
- [Characterization of Coconut Shell Liquid Volatile Matter \(CS-LVM\) by Using Gas Chromatography](#)  
Muhammad Jahiding, Mashuni, WOS Ilmawati et al.

## STUDIES OF CARBONIZATION PROCESS ON THE PRODUCTION OF DURIAN PEEL BIOBRIQUETTES WITH MIXED BIOMASS COCONUT AND PALM SHELLS

Ellyta Sari<sup>1</sup>, Pasymi<sup>1</sup>, Umar Khatab<sup>2</sup>, Reni Desmiarti<sup>1</sup>, Rian Ariansyah<sup>1</sup>, Hariadi<sup>1</sup>, Sutra<sup>1</sup>

<sup>1</sup>Departement of Chemical Engineering, Universitas Bung Hatta, Padang West Sumatra, Indonesia

<sup>2</sup>Department of Civil Engineering, College of Technology Payakumbuh, West Sumatra, Indonesia  
E-mail : sariellyta@yahoo.com

**Abstract.** Biobriquettes as alternative energy that can replace the role of kerosene. Biobriquettes made from agricultural waste biomass. Biobriquettes durian peel has been researched and developed continuously to obtain optimal quality in terms of calorific value, compressive strength and duration of ignition. In making durian peel biobriquettes needed other biomass mix to sustain duration of Ignition for biobriquettes durian skin quickly burned out. Stages of making biobriquettes durian skin are: material of drying, carbonization of biomass, grinding, mixing with adhesives, and printing. Carbonization process is a process that is important in obtaining the biomass charcoal. Carbonization is done by means of karbonisator pyrolysis. The purpose of this research is to study the process of carbonization to obtain biobriquettes durian skin that of quality in terms of value compressive strength, calorific value, and duration of ignition. Variations that done was kind mix of biomass,coconut shells and palm shells with the massa ratio 2 : 1, type of adhesive used tapioca powder and banana peels, carbonization of temperature 200°C, 300°C and 400 °C . The results showed that the highest compressive strength of the durian skin with a mixture of coconut shell and adhesive tapioca powder and carbonization temperature of 300 °C namely 12,7 g/cm<sup>2</sup>. The calorific value of the highest on the mix of skin durian with coconut shells and adhesive banana skin with temperature of carbonization 400 °C ie 6040 cal/g, and duration of ignition highest on a mixture of skin durian with coconut shell and adhesive banana skin at a temperature of carbonization 300 °C is 73 minutes.

*Keywords :* Biobriquettes, Durian peel , Carbonization.

### 1. Introduction

Renewable alternative energy sources is being developed in Indonesia. One of these is biobriquettes from biomass. Biomass is composed of cellulose, hemicellulose and lignin that is commonly found in plant parts. Biomass is a renewable reseources that can be used sustainably.

Durian peel waste is one of biomass that could be used as a raw material source of renewable energy. Several studies of Biobriquettes of durian peel has been conducted. (Pramudya, et al.,2011) studied the variation of biomass and adhesive mixture. However, these studies without using the carbonization process of durian peel. In the biobriquettes manufacture, carbonization is a very important process because it is the main process in the biobriquettes manufacture which can affect the biobriquettes quality.

Carbonization process is done by burning biomass in open condition, the burning process then stopped when the charcoal formed, by spraying water on the charcoal that has been formed. This kind of process generated a lot of ash and smoke so that the charcoal making process is not optimal and produced only a little charcoal. Therefore it is necessary to look for solutions, so



that the carbonization process authoring maximum results, which produces little ash, it also can take advantage of combustion smoke as liquid smoke which can be used as a natural food preservative, which is not harmful.

This is known as pyrolysis process (Mira, M, 2002). The characteristics of durian peel as an alternative fuel by the pyrolysis process has been investigated (Wahidin, 2014). In this study, the ash content obtained is still high (18.8%), caused not using a mixture of biomass. The process of making biobriquettes by pyrolysis carbonization been done by (Feri Fuji, 2010), at a temperatures of 210, 250, 300, 350, and 390<sup>0</sup>C using rice husk as raw materials, and the highest calorific value obtained at 5609.453 cal/g. In addition (Warapon R, *et.al*, 2011) also examined biobriquettes durian peel with a mixture of rice straw (9: 1) the calorific value obtain is 24,674MJ/kg (5902 cal/g). While (G. Sires, *et al*, 2016) examined the types of palm briquette powder and binder, providing a calorific value of 20 945 MJ /kg (5010 cal/g) at 80.79% efficiency.

(Paisal, 2014) conducted a study of biobriquettes made from durian peel using an adhesive with banana peel waste without mixing other biomass, and the calorific values obtained 5074 cal/g. (Sari, E, *et.al* , 2015) also did research on biobriquettes durian peel with a mixture of biomass palm shells and rubber shell, using starch as an adhesive. From this study, the highest calorific value obtained of 5118 cal/g. (Merry, *et.al*, 2015) also examined using an adhesive calcium hydroxide and obtained calorific value of 4968 cal/g. Accordingly it is need to do research with the pyrolysis carbonization process of durian peel, so that the higher ash levels can be reduced by using a mixture of other biomass.

Moreover carbonization pyrolysis also produces liquid smoke which can be used as a preservative. This research will be carried out at a pyrolysis carbonization temperature of 200-400<sup>0</sup>C with adhesive from banana peels waste and starch as a comparison, by add biomass from coconut shell and palm shell to increase the calorific value of biobriquettes.

The purpose of this study was to determine the effect of carbonization temperature to the biobriquettes result, the effect of biomass mixture with biomass durian peel to the calorific value, and the effect of adhesive type to quality of biobriquettes produced.

## **2. Methodology/ Experimental**

This research was conducted at the Laboratory of Chemical Engineering, Universitas Bung Hatta Padang. The research parameters consist of Fixed Parameters, Variable Parameters, and Output Parameters. Fixed Parameters are biomass of durian peel, adhesive: 10% from the total biomass mixture, biomass mixture with composition ratio 2: 1, with a total weight of biomass at 140 grams. Variable parameters is another biomass mixture, : palm shells, coconut shells; different types of adhesives: starch and banana peels; Carbonization temperature at 200, 300, and 400<sup>0</sup>C. Output parameters are compression strength, porosity, calorific value, ash content and burning time.

### **2.1. Tools**

Pyrolysis carbonization reactor, condenser, biomass cutlery, sifter, Mixers, grinding, Biobriquettes Molds, basin, Zinc for drying, Stove, Pots, Spatula, scales, oven, desiccator and porcelain dish.

### **2.2. Materials**

Durian peels from Padang, Biomass mixture consist of palm shells, Coconut shell, adhesive from starch flour, banana peel, and water.

### **2.3. Working Procedures**

#### **2.3.1. Carbonization Stage by means of Pyrolysis Carbonization**

- a. The durian peel was chopped up small, so that the drying process can be faster and more volume of material can be fed into the reactor
- b. All material is dried under the sun for 4-5 days.
- c. once the ingredients dry, biomass was entered in the carbonization reactor, then temperatur of heating was set and biomass was entered until almost full and then reactor was covered tightly.
- d. The heater is switched on and the carbonization temperature is adjusted (according to variations at 200, 300 and 400°C) with a heating time of 2 hours each.
- e. After two hours, pull out the carbonization results, then crush until smooth at size of 60 mesh.
- f. The same thing is done on another biomass mixture; palm shell and coconut shell

#### **2.3.2. Adhesives Manufacturing Phase**

##### **A. Making Adhesives From Starch**

Starch weighed as much as 10% of the total biomass feedstock, next insert the water at a ratio of 1: 10, then stirred. Starch solution was then heated on a stove until thickened.

##### **B. Making Adhesives from Banana Peel**

Banana peel retted  $\pm$  10 days, then was mashed. The smooth banana peel is mixed with 10% of the total weight of the biomass feedstock, then was add water gradually until homogeneous.

#### **2.3.3. Briquetting Phase**

The smooth durian peels charcoal is weighed according to the specified weight and the specified biomass variation. The refined durian peel is mixed with the adhesive in the container while stirring until evenly Further the mixture were molded using biobriquettes mold. Biobriquettes then dried under the sun until completely dry.

### **2.4. The tools image series can be seen in Figure 1.**



Figure 1. The series of pyrolysis carbonisator dual function tool

Information :

1. Reactor; 2. Furnace; 3. Thermometer; 4. Pressure Gauge; 5. Condenser; 6. The Hot Water flow; 7. The Cold Water flow in; 8. Condensate Flow; 9. Liquid smoke Container; 10. The cooling water hose

### 3. Results and Discussion


Biobriquettes shape produced from the research of Manufacturing of biobriquettesdurian peel from the mixture of biomass and adhesive, can be seen in Figure 2.



**Figure 2.** Biobriquettes of Mixture of Biomass and Adhesives

#### 3.1. Effect of Raw Materials to the Biobriquettes Porosity/ Density

Porosity/density is the ratio between the weight to the volume of briquettes. Density size is influenced by the size and homogeneity of the briquettes materials. Based on observations and calculations performed on the density value of each treatment, smaller particle size can expand the field of bonding between powders, thus increasing the density of briquettes (Masturin 2002). The effect of a biomass mixture to porosity can be seen in Figure 3 and Figure 4.

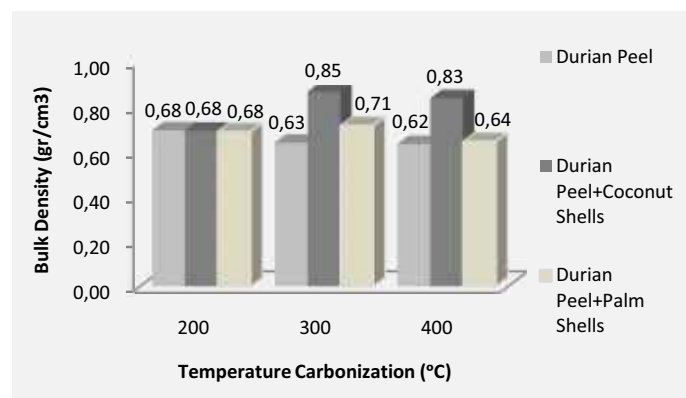

**Figure 3.** Effect of Biomass Mixture Using Adhesives Starch To The Porosity

From Figure 3 and Figure 4 can be seen that the mixing of biomass coconut shell and palm shells charcoal with durian peel (agricultural waste) at a smaller size (60 mesh) could expand the bonding between particles, thereby increasing the biobriquettes density, since the bonds between powder are stronger and more compact.

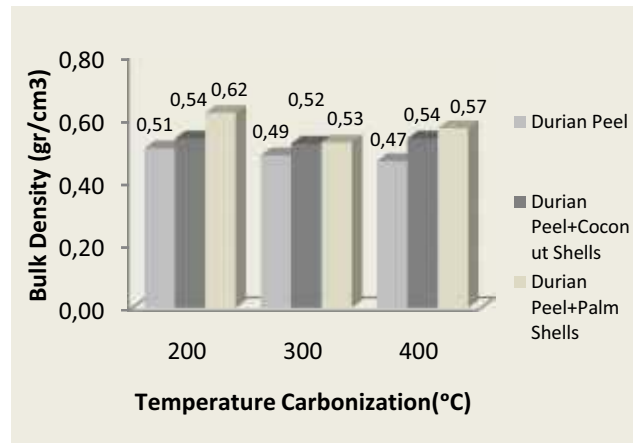


Figure 4. Effect of Biomass Mixture Using Adhesives Banana Peel to the Porosity

Figure 3 and Figure 4 show that biobriquettes porosity values ranged from 0.47 to 0.85 g/cm<sup>3</sup>. Biobriquettes with adhesive starch obtained the best porosity of 0.85 g/cm<sup>3</sup> with a mix of biomass durian peel and coconut shell, while biobriquettes with adhesive banana peel earned best porosity of 0.62 g/cm<sup>3</sup> with a mixture of durian peel biomass and palm shells. Adhesive banana peel does not have a strong bond between the fibers, it is because the banana peel adhesion is not as strong of starch adhesion. This leads to a lower density value. Thus, the composition of the constituent material effect the biobriquettes density.

### 3.2 Effect of the Mixture of Biomass and Adhesive on Compression Strength

Effect of biomass mixture and adhesive on biobriquettes compression strength can be seen in Figure 5 and Figure 6.

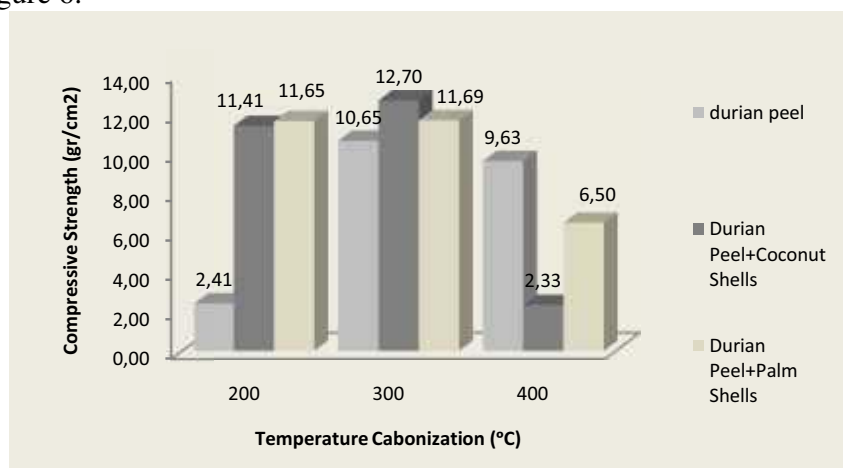


Figure 5. Effect of Biomass Mixture using Adhesives Starch To The Compression Strength

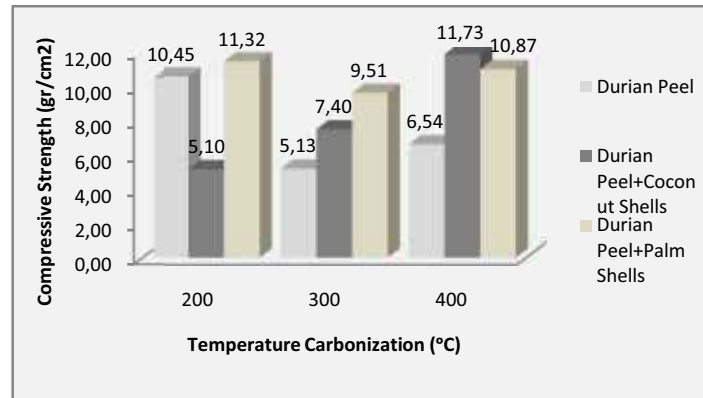


Figure 6. Effect of Biomass Mixture Using Adhesives Banana Peels To The Compression Strength

Figure 6 and 7 shows that the highest compression strength at  $12.70 \text{ g/cm}^2$ , using adhesive starch with a mixture of coconut shell biomass at temperatures of  $300^\circ\text{C}$ , while the highest compression strength using adhesive banana peel with a mixture of biomass palm shell at temperature of  $400^\circ\text{C}$ , namely  $11.73 \text{ g/cm}^2$ .

Adhesive starch has a better compression strength than adhesive banana peel, this is due to starch adhesion is higher than banana peel, moreover high density biomass would produce high compression strength biobriquettes as well, as proposed by (Sudrajat,1984), that charcoal biobriquettes from high density raw materials will also provide a high compression strength

### 3.3. The Effect of Biomass Mixture and Adhesive to the Calorific Value

The biomass mixture and adhesives used in biobriquettes manufacture also affect the calorific value. Each sample variation had been tested the calorific value.

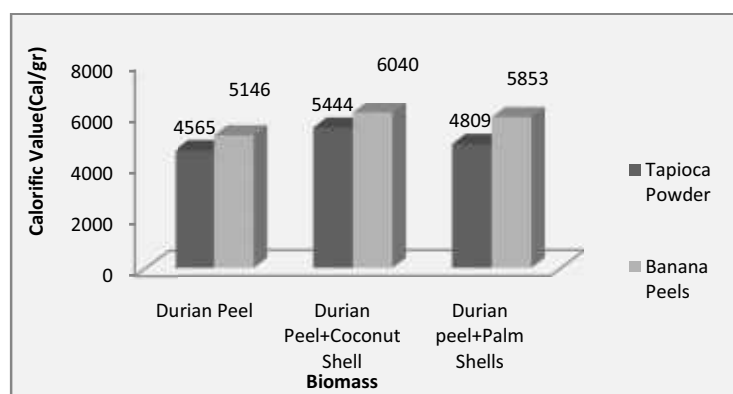


Figure 7. The Effect of Biomass Mixture and Adhesives To The Calorific Value

Figure 7 show that the increasing of calorific value is also influenced by a mixture of biomass used. Calorific value of Biobriquettes durian peel without other biomass mixture are 4564 and

5146 cal/g, and the calorific value were increased become 5444 and 6040 cal/g when biobriquettes durian peel mixed with coconut shell,

Calorific value of biomass using a mixture of palm shells decreased to 4809 and 5853 cal/g. In the research by Pramudya, et.al (2011), the highest calorific value obtained on durian peels and palm shells with jackfruit seed adhesive was 5495 cal / gr. Thereby it can be concluded that the used of adhesive type is can influenced the caloric value. Banana peel adhesive gives the highest calorific values than with the jackfruit seeds adhesive in research Pramudya ,et.al (2011).

The addition of biomass can increase the calorific value of biobriquettes durian peel. The addition of coconut shell biomass provides the best calorific value. This is due to coconut shell has a high carbon compound that gives additional calorific value to the durian peel biobriquettes produced. Adhesive type is also affects the calorific value obtained. Figure 7 shows that adhesive banana peel provides a higher calorific value than adhesive starch.

### 3.4. Effect of carbonization temperature and biomass mixture to the Burning Time

Effect of carbonisation temperature and biomass mixtures to the biobriquettes burning time can be seen in Figure 8 and Figure 9.

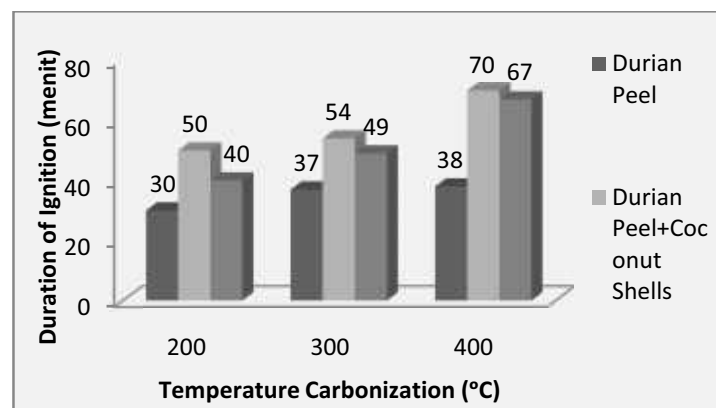


Figure 8. Effect of Carbonisation Temperature and Biomass Mixture Using Adhesives Starch To The Burning Time

Figure 8 and Figure 9 shows that the best burning time of biobriquettes obtained at carbonization temperature of 400°C ie 73 minutes on biobriquettes with adhesive banana peel and coconut shell mixture. This is because the burning temperature of 400 °C completely carbonized biomass as compared with 200°C and 300°C burning temperature, so that the carbon content tied will be higher at burning temperature of 400 °C, so the biobriquettes ignition time to ashes will be longer.



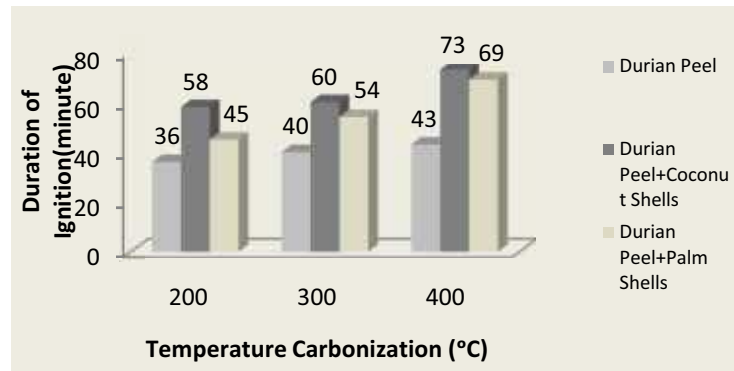


Figure 9. Effect of Carbonisation Temperature and Biomass Mixture Using Adhesive banana peels To The Burning Time

The effect of biomass mixture show that Biobriquettes mix with coconut shells provide the best ignition when compared with other. In research by Munas, et.all (2012) that the best burning time of biobriquettes is 40 minutes on biobriquettes with cocoa beans biomass without the addition of other biomass, but in this study the best burning time of biobriquettes is 73 minutes on biobriquettes with durian peels and coconut shells with banana peel s adhesive.

### 3.5. Effect of Carbonization Temperature and Biomass Mixture to Ash Content

Effect of carbonization temperature and the biomass mixture to ash content can be seen in Figure 10 and 11.


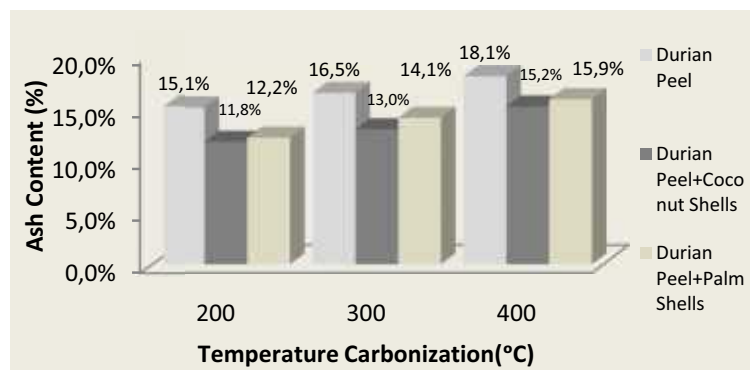


Figure 10. Effect of Carbonisation Temperature and Biomass Mixture using Adhesive starches To Ash Content

Figure 10 and 11 shows that ash content obtained ranged between 10% - 24%. Ash content obtained is not yet meet the standards of <10%. Carbonization temperature of 400 °C give the highest ash content compared to the carbonization temperature of 200 °C and 300 °C.

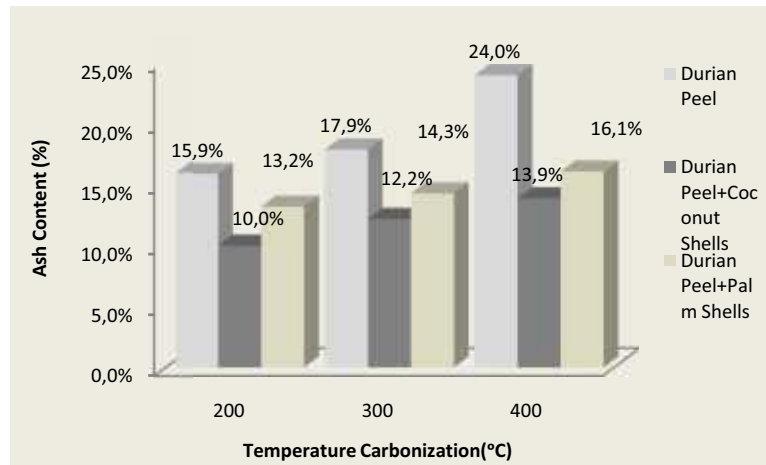

**Figure 11.** Effect of Carbonisation temperature and Biomass Mixture Using Adhesive banana peels To Ash Content

This is due to the ash content will increase at the higher carbonization temperature. Carbon will burn out at higher temperature and leave the ashes as a result from the combustion (Rosdiana, 2016), so it can be said that the carbonization temperature rise is directly proportional to the biobriquettes ash content. On the influence of the biomass mixture, biobriquette mixture of durian peel with coconut shell biomass with adhesive banana peel provide the best ash content is 10%. In research by Pramudya, et. All (2011), biobriquettes mixture of durian peel with palm shell biomass with durian seeds adhesive provides the lowest ash content is 11.90%. This is due to mineral deposits that can not be burned in the coconut shell is lower compared to the others, so that the ash obtained is also low.

#### 4. Conclusion

Results from the study of biobriquettes durian peel give some following conclusions:

- Utilisation of durian peel waste, coconut shell, and palm shells on making biobriquettes may increase the economic value of raw materials.,
- Banana peel waste can be use as an adhesive in the biobriquettes manufacture, but the adhesiveness given still low compared than adhesive starch, but adhesive banana peel can improve the calorific value of biobriquettes.
- The addition of coconut shell and palm shell biomass improve the quality of biobriquettes durian peel.
- Biobriquettes has the highest calorific value at 400°C carbonization temperature, with a mixture of coconut shell and adhesive banana peel of 6040 cal/g. Calorific values obtained reached the calorific standard based on ISO (5000 cal/g).

#### 5. Acknowledgement

Thanks to all the parties concerned to this study: the Higher Education Research and

Technology which funded this research through grants applied, also to all students of guidance that help a lot of this research.

## 6. References

- [1] Feri Fuji Hertanto 2010 *Optimasi Kondisi Operasi Pirolisis Sekam Padi untuk Menghasilkan Bahan Bakar Briket Bioarang Sebagai Bahan Bakar Alternatif* Universitas Diponegoro
- [2] G Siresh Kumar, Dr C J Rao, Dr D Sreeramulu and SK Madhavi 2016 *Evaluation of Boiler efficiency of Bobriquettes by Indirect Method* International Journal of Mechanical Engineering and Technologi Vol. 7 Issue 6 pp 624-633
- [3] John Taiwo Oladeji 2011 *Agricultural and Forestry Wastes and Opportunities for their use as an Energy source in Nigeria* .an overview World Rural Observations 2011;3 (4)
- [4] M Faisal, M Arif Kurniawan and Deni K 2016 *Pengaruh komposisi biobriket dari TKKS, Ampas Tebu, dan serbuk gergaji dengan perekat kanji terhadap nilai pembakaran* Jurnal Teknik Kimia no 4 vol. 22
- [5] Martynis M, Sundari E, Sari E 2012 *Pembuatan Biobriket dari Limbah Cangkang Kakao Briket dari kulit Kakao* Jurnal Litbang No 1 Vol. 2 Padang
- [6] Nona Merry M.Mitan, Akmal H A, Nur Fathiah M N and Sian Meng Se 2015 *Binder Application in Durian Peels Briquettes a Solid Bofuel* Applied Mechanics and Materials vol. 761 pp 494-498 Trans Tech Publicatin Switzerland
- [7] Paisal 2014 *Analisa Kualitas Briket Arang Kulit Durian Dengan Campuran Kulit Pisang pada Berbagai Komposisi Sebagai Bahan Bakar Alternatif* Politeknik Negeri Ambon
- [8] Pasyimi 2012 *Rancangan karbonisator tepat guna Untuk proses Karbonisasi temperatur rendah* Prosiding Seminar Resatek FTI ISSN 2087- 2526 Universitas Bung Hatta Padang
- [9] Pound G S 1959 *Further Progress in Low Temperature Carbonisation of Coal and Production of Chemicals from Low Temperature Tar-1 Coke & Gas*, 396-401
- [10] Pramudya, Sari E, dkk. 2013 *Pembuatan briket kulit durian dengan campuran biomassa sawit dan perekat* E-jurnal Universitas Bung Hatta
- [11] Rosdiana Moeksin, Nabila Zarwan and Muhammad Albusary 2016 *Pembuatan Biobriket dari Campuran Tempurung Kelapa dan Cangkang Sawit Biji Karet* Jurnal Teknik Kimia Universitas Sriwijaya Palembang
- [12] Sari E, Praputri E, dkk. 2015 *Peningkatan Kualitas Biobriket Kulit Durian dari segi campuran Biomassa, bentuk fisik, Kuat Tekan dan Lama Penyalaan* Prosiding Simposium Nasional RAPI XIV-2015 ISSN 1412-9612 Fakultas Teknik UMS Solo
- [13] Sudrajat 1984 *Pengaruh bahan baku, jenis perekat, dan tekanan kempa terhadap kualitas briket arang* Bogor
- [14] Wahidin Nuriana, Nurfa nisa and Martana 2014 *Synthesis Preliminary Studies Durian Peel Bio Briquettes as an Alternative Fuels* Conference and Exhibition Indonesia Renewable Energy & Energy Conservations, Published by Elsevier, energi procedia 47 pp 295-302
- [15] Waraporn Rattanongphisat and Sirinuch Chidaruksa 2011 *A bio-fuel briquette from durian peel and rice straw: Properties and Economic Feasibility* NU Science Jurnal 8 (2) pp1-11

## IOP Conference Series: Materials Science and Engineering



### Scope

*IOP Conference Series: Materials Science and Engineering (MSE)* is an Open Access proceedings journal provides a fast, versatile and cost-effective proceedings publication service.

#### Subjects

- Processing, Manufacturing and applications
- Analysis and characterisation
- Functional materials
- Polymer science
- Glasses and ceramics
- Thin films and surfaces
- Nanostructures and nanomaterials
- Composites
- Biomaterials
- Environment and energy
- Computation and simulation
- Crystalline structure and microstructure
- Structural and mechanical
- Measurement and systems
- Metals, alloys and metallurgy
- Engineering (Electrical, Mechanical, Civil, Chemical and Neuromorphic Computing)



#### JOURNAL LINKS

- [Journal home](#)
- [Journal scope](#)
- [Information for organizers](#)
- [Information for authors](#)
- [Contact us](#)
- [Reprint services from Curran Associates](#)

#### IOPSCIENCE

- [Journals](#)
- [Books](#)
- [IOP Conference Series](#)
- [About IOPscience](#)
- [Contact Us](#)
- [Developing countries access](#)
- [IOP Publishing open access policy](#)
- [Accessibility](#)

#### IOP PUBLISHING

- [Copyright 2024 IOP Publishing](#)
- [Terms and Conditions](#)
- [Disclaimer](#)
- [Privacy and Cookie Policy](#)

#### PUBLISHING SUPPORT

- [Authors](#)
- [Reviewers](#)
- [Conference Organisers](#)



This site uses cookies. By continuing to use this site you agree to our use of cookies.



IOP Publishing

## IOP Conference Series: Materials Science and Engineering

---

### Table of contents

#### Volume 316

2018

[◀ Previous issue](#)   [Next issue ▶](#)

**Quality in Research: International Symposium on Materials, Metallurgy, and Chemical Engineering 24–27 July 2017, Bali, Indonesia**

Accepted papers received: 07 February 2018

Published online: 27 March 2018

[Open all abstracts](#)

---

### Preface

**OPEN ACCESS**

011001

Quality in Research: International Symposium on Materials, Metallurgy, and Chemical Engineering

[+ Open abstract](#)   [View article](#)   [PDF](#)

---

---

**OPEN ACCESS** 011002

Conference Organizer

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 011003

Acknowledgement

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 011004

Peer review statement

[+ Open abstract](#) [View article](#) [PDF](#)

---

## Papers

---

### Intl. Conf. on Saving Energy in Refrigeration and Air Conditioning (ICSERA)

---

**OPEN ACCESS** 012001

Studies of the water adsorption on Lampung's natural zeolite of Indonesia for cooling application

D A Wulandari, Nasruddin and Lemington

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012002

Characteristics Air Flow in Room Chamber Test Refrigerator Household Energy Consumption with Inlet Flow Variation

Edy Susanto, M. Idrus Alhamid, Nasruddin and Budihardjo

[+ Open abstract](#) [View article](#) [PDF](#)

---

## Intl. Conf.on Dwelling Form (IDWELL) 2017

---

**OPEN ACCESS**

012003

The floating houses of Sintang City: space, resources and political nexus

M S Lubis, T Y Harjoko and D Susanto

[+ Open abstract](#) [View article](#) [PDF](#)

---

## Intl. Conf.on Dwelling Form (IDWELL) 2017 Intl. Symp. on Architecture

---

**OPEN ACCESS**

012004

The concept of sustainable prefab modular housing made of natural fiber reinforced polymer (NFRP)

E Setyowati and E E Pandelaki

[+ Open abstract](#) [View article](#) [PDF](#)

---

## Intl. Symp. on Architecture

---

**OPEN ACCESS**

012005

Thermal Effectiveness of Wall Indoor Fountain in Warm Humid Climate

J A P Seputra

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012006

The Crux of Minimalist Architecture: A Local Strategy of Housing Design in Jakarta or a Break Free from Traditions?

Yulia Nurliani Lukito and Bella Previt Handoko

[+ Open abstract](#) [View article](#) [PDF](#)

---

Intl. Symp. on Chemical Eng.

---

OPEN ACCESS

012007

Degradation Behaviour of Gamma Irradiated Poly(Acrylic Acid)-graft-Chitosan Superabsorbent Hydrogel

Dhena Ria Barleany, Alpin Ilhami, Dea Yusuf Yudanto and Erizal

[+ Open abstract](#) [View article](#) [PDF](#)

---

OPEN ACCESS

012008

The Use of Multi-Reactor Cascade Plasma Electrolysis for Linear Alkylbenzene Sulfonate Degradation

Nelson Saksono, Ibrahim, Zainah and Trisutanti Budikania

[+ Open abstract](#) [View article](#) [PDF](#)

---

OPEN ACCESS

012009

Carbon nanotubes shynthesis in fluidized bed reactor equipped with a cyclone

P Setyopratomo, M Sudibandriyo and P P D K Wulan

[+ Open abstract](#) [View article](#) [PDF](#)

---

OPEN ACCESS

012010

The effect of heating temperature on cytotoxicity and  $\alpha$ -mangostin yield: Mangosteen pericarp juice and mangosteen extract

Kamarza Mulia, Fitria Hasanah and Elsa A Krisanti

[+ Open abstract](#) [View article](#) [PDF](#)

---

OPEN ACCESS

012011

Hydrogen Generation by Koh-Ethanol Plasma Electrolysis Using Double Compartement Reactor

Nelson Saksono, Johannes Sasiang, Chandra Dewi Rosalina and Trisutanti Budikania

[+ Open abstract](#) [View article](#) [PDF](#)



---

**OPEN ACCESS**

012012

[Effect of Feed Gas Flow Rate on CO<sub>2</sub> Absorption through Super Hydrophobic Hollow Fiber membrane Contactor](#)

Sutrasno Kartohardjono, Kevin Alexander, Annisa Larasati and Ivander Christian Sihombing

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012013

[The effect of hydrochloric acid addition to increase carbon nanotubes dispersibility as drug delivery system by covalent functionalization](#)

P P D K Wulan, S H Ulwani, H Wulandari, W W Purwanto and K Mulia

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012014

[CFD study of mixing miscible liquid with high viscosity difference in a stirred tank](#)

S Madhania, A B Cahyani, T Nurtono, Y Muharam, S Winardi and W W Purwanto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012015

[CFD Modelling of Adsorption Behaviour in AGN Tank with Polyethylene Terephthalate Plastic Waste Based Activated Carbon](#)

Yuliusman, M K Afdhol, Alristo Sanal and Nasruddin

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012016

[Carbon monoxide and methane adsorption of crude oil refinery using activated carbon from palm shells as biosorbent](#)

Yuliusman, M K Afdhol and Alristo Sanal

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012017

Synthesis and characterization of methyltrihydroxysilane water repellent

A Z Abidin, M N Harjandi, V Wirawan and S M Suharno

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012018

Preparation of hollow mesoporous carbon spheres and their performances for electrochemical applications

T Ariyanto, G R Zhang, A Kern and B J M Etzold

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012019

Reaction product of pyrogallol with methyl linoleate and its antioxidant potential for biodiesel

H Sutanto, L Ainny, Lukman, B H Susanto and M Nasikin

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012020

Catalytic Pyrolysis of Waste Plastic Mixture

Ferdianta Sembiring, Chandra Wahyu Purnomo and Suryo Purwono

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012021

Studies of Carbonization Process on the Production of Durian Peel Biobriquettes with Mixed Biomass Coconut and Palm Shells

Ellyta Sari, Pasymi, Umar Khatab, Reni Desmiarti, Rian Ariansyah, Hariadi and Sutra

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012022  
Determination of Extraction Process Conditions of Gambier Catechin (*Uncaria Gambier Roxb*) from Solok Bio Bio Lima Puluh Kota District – West Sumatera

Elly Desni Rahman, Ellyta Sari, Burmawi, Frizka and Endah

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012023  
Monoglyceride contents in biodiesel from various plants oil and the effect to low temperature properties

L Aisyah, C S Wibowo, S A Bethari, D Ufidian and R Anggarani

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012024  
Synthesis of Biodiesel from Crude Palm Oil by Using Contact Glow Discharge Electrolysis

Nelson Saksono, Danar Aditya Siswosoebrotho, Jeremia J. C. Pranata and Setijo Bismo

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012025  
Effect of Mechanochemical and Roasting Techniques for Extraction of Rare Earth Elements from Indonesian Low-Grade Bauxite

E Kusrini, S Harjanto, F Herdino, EA Prasetyanto and A Rahman

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012026  
Performance Study of Fluidized Bed Dryer with Immersed Heater for Paddy Drying

S Suherman, N F Azaria and S Karami

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012027  
Modeling of a Reaction-Distillation-Recycle System to Produce Dimethyl Ether through Methanol Dehydration

Y Muharam, L M Zulkarnain and A S Wirya

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012028  
Effect of sodium tripolyphosphate concentration and simulated gastrointestinal fluids on release profile of paracetamol from chitosan microsphere

Kamarza Mulia, Andrie and Elsa A Krisanti

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012029  
Textile Dye Removal from Aqueous Solution using Modified Graphite Waste/Lanthanum/Chitosan Composite

E Kusrini, B Wicaksono, Y Yulizar, EA Prasetyanto and C Gunawan

[+ Open abstract](#) [View article](#) [PDF](#)

---

**Intl. Symp. on Chemical Eng. Intl. Symp. on Mechanical and Maritime Eng.**

---

**OPEN ACCESS** 012030  
Preparation and Characterization of Graphite Waste/CeO<sub>2</sub> Composites

E Kusrini, C S Utami, Nasruddin, E A Prasetyanto and Aji A Bawono

[+ Open abstract](#) [View article](#) [PDF](#)

---

## Intl. Symp. on Chemical Eng. The 3rd Biannual Meeting on Bioprocess Engineering

---

**OPEN ACCESS**

012031

[Improvement of cement plant dust emission by bag filter system](#)

Chandra Wahyu Purnomo, Wiratni Budhijanto, Muziibu Alfisyah and Triyono

[+ Open abstract](#) [View article](#) [PDF](#)

---

## Intl. Symp. on Civil and Env. Eng.

---

**OPEN ACCESS**

012032

[Numerical and analytical investigation of steel beam subjected to four-point bending](#)

F. M. Farida, A Surahman and A Sofwan

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012033

[STUDY GRADATION AND MOISTURE CONTENT OF SAND EMBANKMENT ON PEAT SUBJECTED VIBRATION POTENTIAL LIQUEFACTION](#)

Soewignjo Agus Nugroho, Agus Ika Putra and Muhamad Yusa

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012034

[Paper for Publication in IOP: Conference Series Leachate Treatment using three Years Aged Lysimetric Bioreactor Models](#)

Djoko M. Hartono, Gabriel Andari Kristanto, Irma Gusniani Sofian, Ahmad Fauzan and Ghanis Mahdiana

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012035

Bearing capacity of helical pile foundation in peat soil from different, diameter and spacing of helical plates

F Fatnanta, S Satibi and Muhardi

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012036

Deformation of high performance concrete plate under humid tropical weather

C Niken, T Elly, FX Supartono and I Laksmi

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012037

Performance of Asphalt Concrete Wearing Course (AC-WC) Utilizing Reclaimed Asphalt Pavement from Cold Milling Bound with 80/100 Pen Asphalt

I N.A. Thanya, I W. Suweda and G.K. Putra

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012038

THE INFLUENCE OF SAND'S GRADATION AND CLAY CONTENT OF DIRECT SHEART TEST ON CLAYEY SAND

Gunawan Wibisono, Soewignjo Agus Nugroho and Khairul Umam

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012039

Using Cementitious Materials Such as Fly Ash to Replace a Part of Cement in Producing High Strength Concrete in Hot Weather

Gidion Turuallo and Harun Mallisa

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012040

Ductility of polystyrene waste panel

Dewi Sulistyorini and Iskandar Yasin

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012041

The drag forces exerted by lahar flows on a cylindrical pier: case study of post Mount Merapi eruptions

Zainul Faizien Haza

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012042

Estimating design flood and HEC-RAS modelling approach for flood analysis in Bojonegoro city

R M S Prastica, C Maitri, A Hermawan, P C Nugroho, D Sutjiningsih and E Anggraheni

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012043

Comparative analysis layers method of t-beam reinforcement

Dimas Langga Chandra Galuh

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS** 012044

Performance Analysis of Trans-Jakarta Bus Suburban Service Move-Across Greater Jakarta

ESW Tangkudung and C Widyadayinta

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012045

[Incorporating Servqual-QFD with Taguchi Design for optimizing service quality design](#)

M. Arbi Hadiyat

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012046

[Segmentation of Natural Gas Customers in Industrial Sector Using Self-Organizing Map \(SOM\) Method](#)

A M Masbar Rus, R Pramudita and I Surjandari

[+ Open abstract](#) [View article](#) [PDF](#)

---

### Intl. Symp. on Materials and Metallurgy

---

**OPEN ACCESS**

012047

[The Effect Of Local Coal And Smelting Sponge Iron On Iron Content Of Pig Iron](#)

Soesaptri Oediyani, Pramita Juwita Sari and Djoko Hadi P

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012048

[The 15<sup>th</sup> International Conference Quality in Resarch \(Qir\) 2017 Preparation and Ionic Conductivity of  \$\text{Li}\_{3.9}\text{Ca}\_{0.1}\text{Ti}\_5\text{O}\_{12}\$  Using Waste Chicken Eggshells as ca Source for Anode Material of Lithium-Ion Batteries](#)

Achmad Subhan, Dedy Setiawan and Sitti Ahmiatri Saptari

[+ Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012049

[The tensile strength of mechanical joint prototype of lontar fiber composite](#)

Jefri Bale, Dominggus G.H. Adoe, Kristomus Boimau and Thomas Sakera

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012050

[A preliminary study on the reduction of limonite ore by using rice husk as a reducing agent](#)

Ahmad Maksum, Michael Kelvin E. Husein, Sulaksana Permana, Andi Rustandi and Johny Wahyuadi Soedarsono

[+](#) [Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012051

[Microstructural and Mechanical Properties of Welded High Strength Steel Plate Using SMAW and SAW Method for LPG Storage Tanks](#)

Winarto Winarto, Rini Riastuti and Nur Kumeidi

[+](#) [Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012052

[Upgrading tantalum and niobium oxides content in Bangka tin slag with double leaching](#)

J W Soedarsono, S Permana, J K Hutauruk, R Adhyputra, A Rustandi, A Maksum, K S Widana, K Trinopiawan and M Anggraini

[+](#) [Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012053

[Preparation of Fe<sub>3</sub>O<sub>4</sub>/Bentonite Nanocomposite from Natural Iron Sand by Co-precipitation Method for Adsorbents Materials](#)

Perdamean Sebayang, Candra Kurniawan, Didik Aryanto, Eko Arief Setiadi, Konni Tamba, Djuhana and Toto Sudiro

[+](#) [Open abstract](#) [View article](#) [PDF](#)

---

**OPEN ACCESS**

012054

[Properties of carbon composite paper derived from coconut coir as a function of polytetrafluoroethylene content](#)

Fredina Destyorini, Indriyati, Nanik Indayaningsih, Bambang Prihandoko and Anne Zulfia Syahrial

[+](#) [Open abstract](#) [View article](#) [PDF](#)



**OPEN ACCESS**

012055

Preparation of anatase TiO<sub>2</sub> nanoparticles using low hydrothermal temperature for dye-sensitized solar cell

N Sofyan, A Ridhova, A H Yuwono and A Udhiarto

[+ Open abstract](#) [View article](#) [PDF](#)

---

**Intl. Symp. on Mechanical and Maritime Eng.**

**OPEN ACCESS**

012056

Optimization of the Water Volume in the Buckets of Pico Hydro Overshot Waterwheel by Analytical Method

Budiarso, Dendy Adanta, Warjito, A I Siswantara, Pradhana Saputra and Reza Dianofitra

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012057

The Design of Connection Solid Oxide Fuel Cell (SOFC) Integrated Grid with Three-Phase Inverter

Darjat, Sulisty, Aris Triwiyatno and Humaid Thalib

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012058

Two-phase Frictional Pressure Drop of Propane with Prediction Methods of Viscosity and Density in 500  $\mu$ m Diameter Tube

S Novianto, A S Pamitran, R Koestoer and K Saito

[+ Open abstract](#) [View article](#) [PDF](#)

**OPEN ACCESS**

012059

CFD investigation of pentamaran ship model with chine hull form on the resistance characteristics

Yanuar and W Sulistyawati

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012060

Mathematical Modeling – The Impact of Cooling Water Temperature Upsurge on Combined Cycle Power Plant Performance and Operation

Ahmad Indra Siswantara, Hariyotejo Pujowidodo, Asyari Darius and Gun Gun Ramdhan Gunadi

[+ Open abstract](#) [View article](#) [PDF](#)

---

### The 3rd Biannual Meeting on Bioprocess Engineering

OPEN ACCESS

012061

Model Predictive Control Based on System Re-Identification (MPC-SRI) to Control Bio-H<sub>2</sub> Production from Biomass

A Wahid and H M H Taqwallah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012062

Producing armyworm (*spodoptera sp.*) Bioinsecticide based on cysteine protease of red ginger (*zingiber officinale var. Rubrum*)

N T Afnan, D F Nur, T S Utami, M Sahlan, A Wijanarko and H Hermansyah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012063

Anaerobic digestion of citrus waste using two-stage membrane bioreactor

Ria Millati, Lukitawesa, Ervina Dwi Permanasari, Kartika Wulan Sari, Muhammad Nur Cahyanto, Claes Niklasson and Mohammad J. Taherzadeh

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012064

Techno-economic analysis of lipase enzyme production from agro-industry waste with solid state fermentation method

I M Hidayatullah, R Arbianti, T S Utami, M Suci, M Sahlan, A Wijanarko, M Gozan and H Hermansyah

[+ Open abstract](#) [View article](#) [PDF](#)

- OPEN ACCESS** 012065  
[CO<sub>2</sub> Absorption from Biogas by Glycerol: Conducted in Semi-Batch Bubble Column](#)  
Pratiwi puji lestari, Aswati Mindaryani and S. K. Wirawan  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012066  
[Effect of some variable in cellulase production by \*Aspergillus niger\* ITBCC L74 using solid state fermentation](#)  
B Abdullah, S Maftukhah, E Listyaningrum and F Faradhiba  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012067  
[Ozone Disinfection of \*Vibrio vulnificus\* in Shrimp Pond Water](#)  
Wara Dyah Pita Rengga, Echa Cahya Julyta Putri, Ria Wulansarie and Agus Suryanto  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012068  
[Ozone Technology for Pathogenic Bacteria of Shrimp \(\*Vibrio sp.\*\) Disinfection](#)  
Ria Wulansarie, Wara Dyah Pita Rengga and Rustamadji  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012069  
[Influence of Nutrient Impregnated into Zeolite Addition on Anaerobic Digestion of Palm Oil Mill Effluent \(POME\)](#)  
M Mellyanawaty, F M A Chusna, H Sudiby, N Nurjanah and W Budhijanto  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012070  
[Characterization of modified zeolite as microbial immobilization media on POME anaerobic digestion](#)  
Rochim B Cahyono, Sri Ismiyati, Simparmin Br Ginting, Melly Mellyanawaty and Wiratni Budhijanto  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012071  
[Kinetics of Anaerobic Digestion of Palm Oil Mill Effluent \(POME\) in Double-Stage Batch Bioreactor with Recirculation and Fluidization of Microbial Immobilization Media](#)  
L I Ramadhani, S I Damayanti, H Sudiby and W Budhijanto  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012072  
[Modeling Lab-sized Anaerobic Fluidized Bed Reactor \(AFBR\) for Palm Oil Mill Effluent \(POME\) treatment: from Batch to Continuous Reactors](#)  
Muhammad Mufti Azis, Hanifrahmawan Sudiby and Wiratni Budhijanto  
[+ Open abstract](#) [View article](#) [PDF](#)
- 
- OPEN ACCESS** 012073  
[Effect of biofilm and selective mixed culture on microbial fuel cell for the treatment of tempeh industrial wastewater](#)  
Rita Arbianti, Tania Surya Utami, Vifki Leondo, Elisabeth, Syafira Andyah Putri and Heri Hermansyah  
[+ Open abstract](#) [View article](#) [PDF](#)



UNIVERSITAS  
INDONESIA  
Widyadarmas



*The Westin Resort  
Nusa Dua, Bali  
24-27 July 2017*

**The 15<sup>th</sup> International Conference on QIR  
(Quality in Research)**

**Certificate**

This is to certify that

*Ellyta Sari*

attended

**The 15<sup>th</sup> International Conference on QIR (Quality in  
Research)**

**24-27 July 2017, Nusa Dua Bali, Indonesia**

as

*Presenter*

Universitas Indonesia  
Faculty of Engineering  
Dean.



Prof. Dr. Ir. Dedi Priadi, DEA.

QIR 2017  
General Chair.

Ardiyansyah, S.T., M.Eng., PhD